

Dream House

BUILDING MATERIALS TRADING LLC

Since 2008

بيت الحلم
لتجارة مواد البناء ك.م.م.
منذ ٢٠٠٨

COMPANY PROFILE






ABOUT DREAM HOUSE

Dream House Building Material L.L.C is a well known building material supplier which is located in Sharjah. We are a competitive supplier, Retailer, Wholesaler and distributor of all kind of ceramics, marbles, granite, and sanitary wares. At Dream House, we provide you the high quality materials, superior services, timely delivery and wide knowledge of products. DHBM provides complete line of building material with a customer friendly sales team.

DHBM study the requirements of our customers, in order to overcome the expectation they keep on our company. DHBM sales staffs are always ready to enlighten our customers with solutions for their enquiry. Whether it's a large commercial job or small residential project, we can meet up the requirement which let the work rolling.

OUR MISSION

The main mission of DHBM is to be well known among the building material suppliers in UAE, to achieve this we always satisfy our customers by overcoming their expectations.

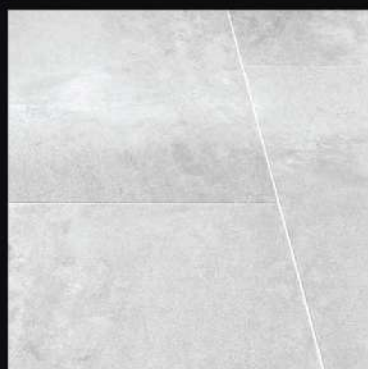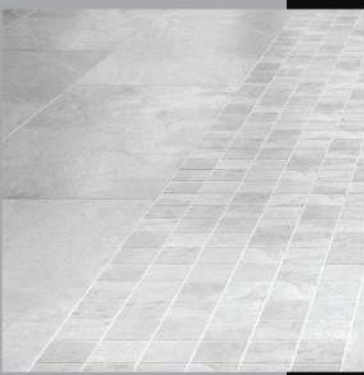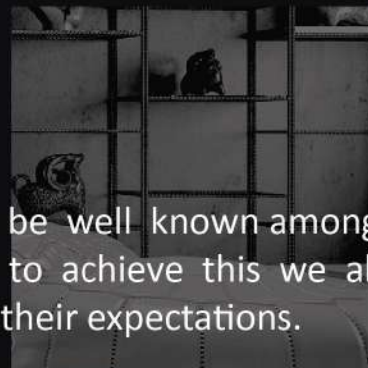



DHBM STRUCTURE

Firm Name : Dream House Building Materials Trading LLC

Business Type : Importer, Supplier, Dealer and Retailer.

Advantage : Wide range of quality products at competitive price with timely delivery.

Product Range

- Ceramic, Porcelain & Granite Tiles
- Outdoor Porcelain Tiles
- Marble & Granite
- Glass Mosaic & Natural Mosaic
- Roof tiles
- Wall Cladding Tiles
- Sanitary Wares & Water Mixers etc
- Crystal Tiles
- Swimming pool Tiles
- Natural Stones

Import Markets: SPAIN, ITALY, PORTUGAL, CHINA, OMAN & INDIA.

Export Markets: AFRICA, GCC & EUROPIAN COUNTRIES



Dream House

BUILDING MATERIALS TRADING LLC

Since 2008

OUR PRODUCTS



60x120cm

Teknica
Homogeneous
Body


Matt
Finish

9mm
16mm
THICKNESS


Scan for
360°
View




Available Colours




UNIQUE THAR BEIGE




UNIQUE THAR BLACK




UNIQUE THAR SMOKE



UNIQUE THAR BLACK



UNIQUE THAR GREY



UNIQUE THAR WHITE



60x120cm

Teknica
Homogeneous
Body


Matt
Finish

9mm
16mm
THICKNESS

Scan for
360°
View



INFINITY ROXX RUSTY

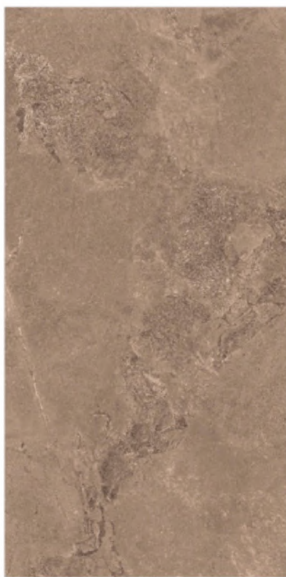

UNIQUE THAR RUSTY



INFINITY RUSTY BRICK LINER



INFINITY RUSTY ROXX RIVER STONE



UNIQUE RUSTY THAR RIVER STONE
Also Available In 16 mm



INFINITY ROXX RUSTY 60 x 60 cm



60x120cm

Teknica
Homogeneous
Body

Matt
Finish

9mmx 16mm

Scan for
360°
View



Available Colours




CROSS CUT CLAY




CROSS CUT SAND



CROSS CUT ANTHRACITE

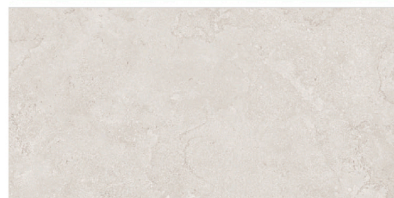

CROSS CUT SILVER

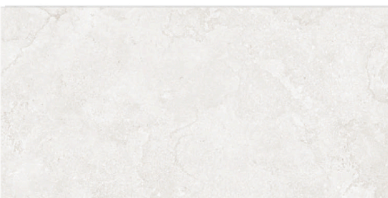

CROSS CUT ICE



CROSS CUT GRIGIO




60x120cm

Teknica
Homogeneous
Body


Matt
Finish

9mm
THICKNESS

Scan for
360°
View

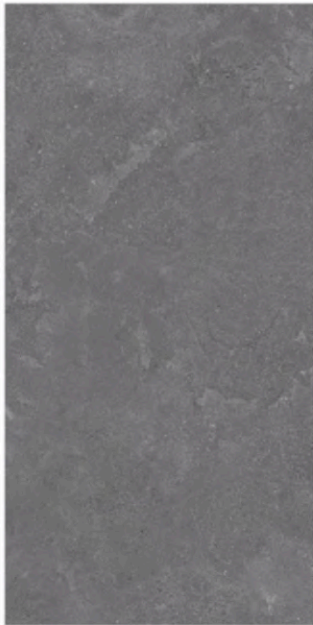

CROSS CUT ANTHRACITE

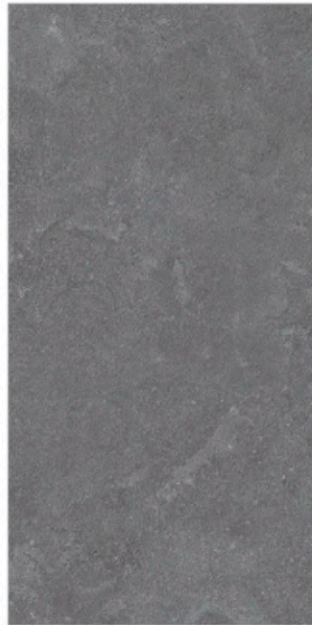

CROSS CUT ANTHRACITE FLAMED
Also Available In 16 mm




CROSS CUT ANTHRACITE STONE LINER



VEN CUT ANTHRACITE



VEN CUT ANTHRACITE FLAMED



CROSS CUT ANTHRACITE 60 x 60 cm



60x120cm

Teknica
Homogeneous
Body

Matt
Finish

9mm
THICKNESS

Scan for
360°
View




Available Colours



COUNTY MID SLATE



COUNTY CLEAR SLATE

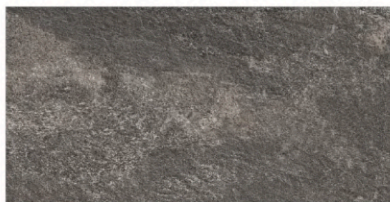

COUNTY DEEP SLATE



COUNTY LIGHT NATURAL SLATE



60x120cm

Teknica
Homogeneous
Body

Matt
Finish

9mm
THICKNESS

Scan for
360°
View



COUNTY DEEP



COUNTY DEEP SLATE



COUNTY DEEP REGA LINER





60x120cm

Teknica
Homogeneous
Body

Matt
Finish


9mmx 16mm

Scan for
360°
View




PREVIEW OF
QUARRY BEIGE + STRIP LINER TUSK ROCK

Available Colours

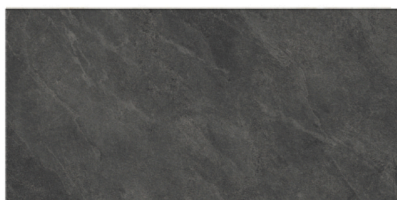


QUARRY COAL

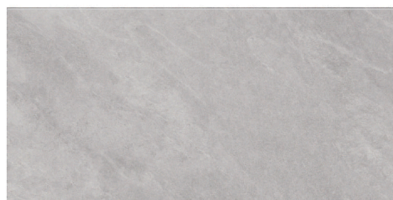

QUARRY STEEL




QUARRY GRIS

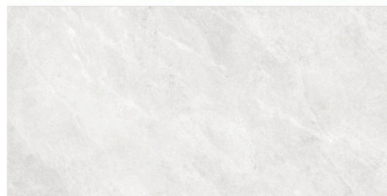

QUARRY BIANCO



QUARRY TUSK

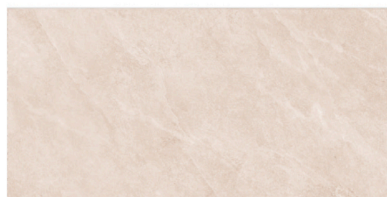

QUARRY BEIGE



60x120cm

Teknica
Homogeneous
Body

Matt
Finish

9mm
THICKNESS

Scan for
360°
View



QUARRY TUSK



QUARRY TUSK ROCK



QUARRY TUSK STRIP
LINER





60x120cm

Teknica
Homogeneous
Body


Matt
Finish

9mm
THICKNESS

Scan for
360°
View




Available Colours

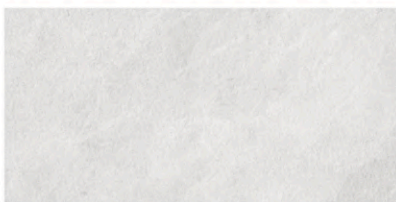


QUARRY BIANCO HAMMER




QUARRY BEIGE HAMMER

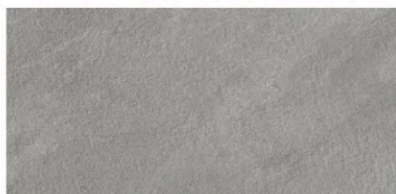

QUARRY GRIS HAMMER

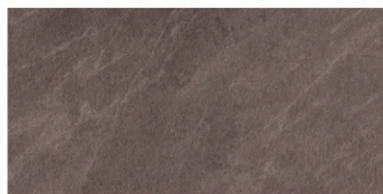

QUARRY TUSK HAMMER

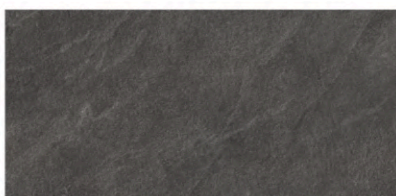

QUARRY COAL HAMMER



60x120cm

Teknica
Homogeneous
Body

Matt
Finish

9mm
THICKNESS

Scan for
360°
View



Available Colours



NEXA STONE SMOKE



NEXA STONE EARTH




NEXA STONE PEARL



NEXA STONE LECO



NEXA STONE IVORY

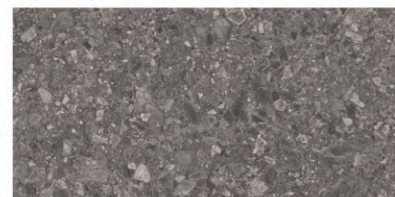

NEXA STONE ANTRACTIVE



60x120cm

Teknica
Homogeneous
Body

Matt
Finish

Scan for
360°
View



NEXA STONE SMOKE



NEXA STONE SMOKE
TRAP



NEXA STONE SMOKE
BAMBOO LINER



NEXA STONE LECCO



NEXA STONE LECCO
TRAP



NEXA STONE LECCO
BAMBOO LINER





60x120cm

Teknica
Homogeneous
Body

Matt
Finish

9mm
THICKNESS

Scan for
360°
View




Available Colours



CORE GRIS



CORE BIANCO

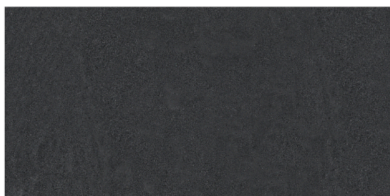

CORE NERO



CORE SAHARA



CORE CREMA



60x120cm

Teknica
Homogeneous
Body

Matt
Finish

9mm
THICKNESS

Scan for
360°
View



Available Colours



EFFETTO NERO OCEAN WAVE LINER



EFFETTO IRON OCEAN WAVE LINER



EFFETTO BIANCO OCEAN WAVE LINER



EFFETTO DELIGHT OCEAN WAVE LINER



EFFETTO GREY OCEAN WAVE LINER




60x120cm

Teknica
Homogeneous
Body

Matt
Finish

9mm
THICKNESS

Scan for
360°
View

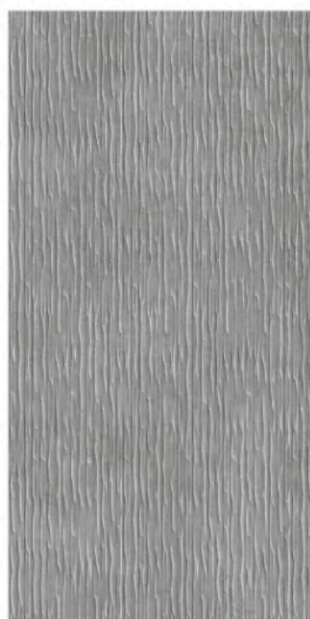

EFFETTO GREY OCEAN
WAVE LINER



EFFETTO GREY



60x120cm

Teknica
Homogeneous
Body

Rustic
Finish

9mm
THICKNESS

Scan for
360°
View



Available Colours




NOVA LECCO




NOVA GRAY



NOVA SMOKE

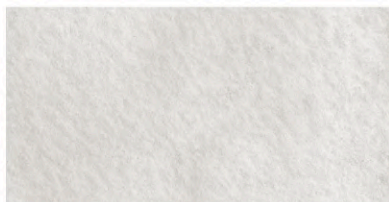

NOVA BIANCO

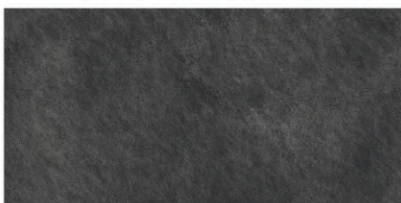

NOV COAL



60x120cm

Teknica
Homogeneous
Body

Matt
Finish

9mm
THICKNESS

Scan for
360°
View



NOVA COAL



NOVA COAL OCEAN
WAVE LINER






60x120cm

Fullbody
Vitrified
Tiles

Rustic
Finish

Scan for
360°
View

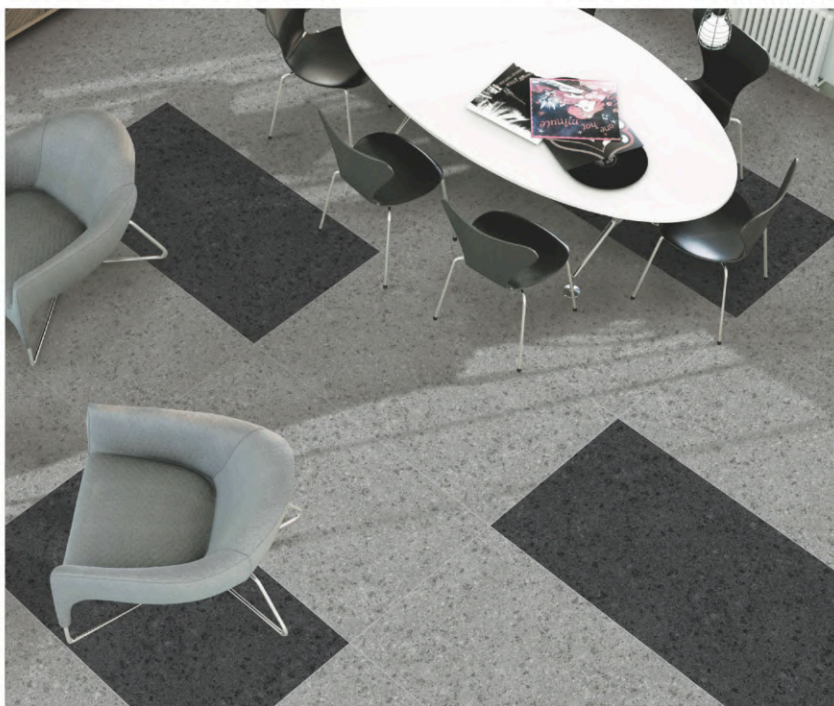

Available Colours & Designs



DOGE ROCK GRIS



DOGE ROCK CREMA




DOGE ROCK NERO



DOGE ROCK TERRA



DOGE ROCK NERO LINER

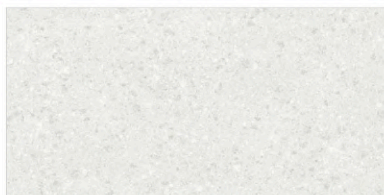

DOGE ROCK BLANCO



60x120cm

Fullbody
Vitrified
Tiles

Matt
Finish

9mmx 16mmx20mm


Scan for
360°
View



Available Colours




GRANITE TERRA



GRANITE CREMA



GRANITE SAHARA



GRANITE BIANCO



GRANITE NERO



GRANITE GRIS



60x120cm
60x60cm

Fullbody
Vitrified
Tiles

Matt
Finish

Scan for
360°
View



PREVIEW OF GRANITE SAHARA



GRANITE SAHARA



GRANITE SAHARA LINER
(ONLY RUSTIC FINISH)





60x120cm

Teknica
Homogeneous
Body

Matt
Finish

Scan for
360°
View



Available Colours & Designs



MOSAIC GREY



MOSAIC GREY LINER



MOSAIC MOUNTAINE



MOSAIC MOUNTAIN LINER



NOV COAL



MOSAIC BLACK DIAMOND



60x120cm

Fullbody
Vitrified
Tiles

Matt
Finish

Scan for
360°
View



TORO SILVER



TORO SMOKE



TORO COPPER




TORO GRIS



TORO STORM



TORO SAND



TORO THUNDER



TORO NERO




60x120cm

Whitebody
Vitrified
Tiles

Glossy
Finish

Dove
Surface


Scan for
360°
View



LEGEND
STATUARIO



LEGEND
STATUARIO STRIP



VETICAN
STATUARIO




NEX
STATUARIO



SOUL STATUARIO



SOUL STATUARIO
STRIP



LORENZO GRAY



NEX STATUARIO
REGAL
LINER



60x60cm

**Teknica
Homogeneous
Body**


**Matt
Finish**

**9mm
16mm
THICKNESS**

Scan for
360°
View



Available Colours



CORE BIANCO



CORE SAHARA



CORE CREMA



CORE GRIS



CORE NERO




60x60cm
60x120cm

**Fullbody
Vitrified
Tiles**

**Rustic
Finish**

9mm
16mm
THICKNESS

Scan for
360°
View




GRANITE CREMA



GRANITE SAHARA



GRANITE TERRA



GRANITE BIANCO



GRANITE GRIS



GRANITE NERO



GRANITE VERDE




60x60cm

Fullbody
Vitrified
Tiles

Matt
Finish

Scan for
360°
View



MOSAIC MOUNTAIN



MOSAIC GREY



MOSAIC BALANCO



MOSAIC BLACK DIAMOND



60x60cm

**Fullbody
Vitrified
Tiles**

**Matt
Finish**

Scan for
360°
View



TORO THUNDER




TORO SAND



TORO STORM



TORO COPPER



TORO SMOKE



TORO SILVER



GRANITE VERDE



TORO NERO



200x1200mm

GLAZED
VITRIFIED
TILES

Matt
Finish

LAYING
POSSIBILITIES



Available Colours



CORE WOOD RED




CONG WOOD



HARD WOOD GREY



CORE WOOD BEIGE

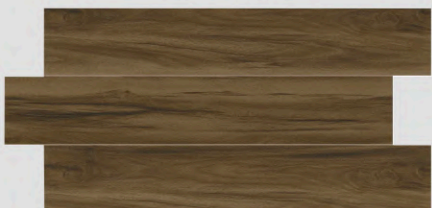

SIENNA WOOD OLIVE



CORE WOOD WHITE

FEATURES





200x1200mm

GLAZED
VITRIFIED
TILES

Matt
Finish


LAYING
POSSIBILITIES




Available Colours



CONGO HONEY PINE

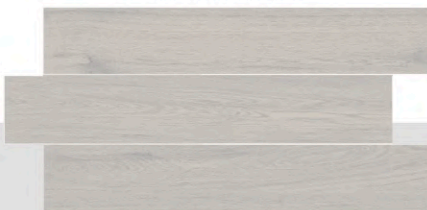

TORINO LIGHT GREY

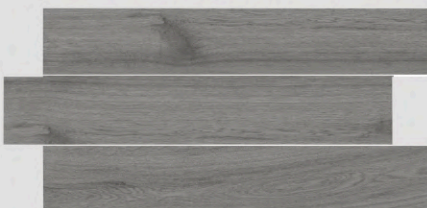

TORINO DARK GREY



REGAL WOOD BEIGE



CASA BEIGE



CORE WOOD WHITE

FEATURES





STEP & RISER

FULL BODY VITRIFIED TILES



BULL NOSE FINISH
Prevent injuries from sharp edges

SELF EMBOSSED GROOVES
Provides Better Grip

ANTI SKID PROPERTY
High Coefficient of Friction

FULL BODY VITRIFIED TILES
Homogeneous Body

Easy to Install


No more handling issues, No more labour-intensive on site installations, No more wastage costs. Our Stepping stone can be easy to install on site.

Safety

These full body vitrified tiles come with double nosing and tread lines that make them skid resistant and much more safe than conventional stairs.

Easy to Maintenance & Long Lasting

Chipped and worn out staircases, constant need for polishing and repairs are all things of the past. Our stepping stone are full bodied vitrified tiles, which means they absorb very low water and are impervious to weather or wear and tear induced damage. Fit them and forget them for years of trouble free performance.

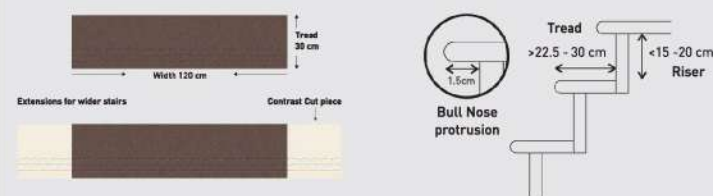

APPLICATION AREAS



INDOOR



OUTDOOR



SWIMMING POOL



FIRE EXIT



UNIVERSITY



HOSPITAL



SHOPPING MALL

PROPERTIES

SIZE AVAILABLE





STEP-UP BIANCO

300 x 1200mm



CREST BIANCO

600 x 1200mm



STEP-UP BEIGE

300 x 1200mm



CREST BEIGE


600 x 1200mm

MINIMALIST




STEP-UP CARLO

300 x 1200mm

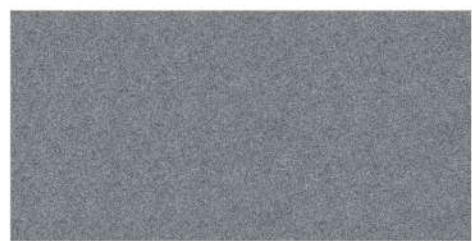

CREST CARLO

600 x 1200mm



STEP-UP GRIS

300 x 1200mm



CREST GRIS


600 x 1200mm

TRENDING



STEP-UP NERO

300 x 1200mm

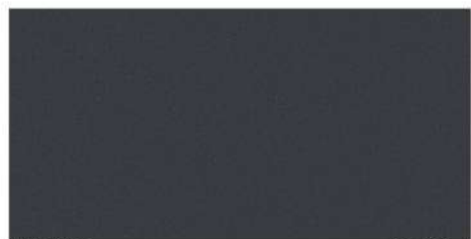

CREST NERO

600 x 1200mm



STEP-UP PLUTO

300 x 1200mm



CREST PLUTO

600 x 1200mm



TECHNICAL SPECIFICATION - FULL BODY VITRIFIED TILES








S. No.	CHARACTERISTIC	International Standards EN12617 Part 1 ISO 13006 Annex G	MEAN VALUE	TEST METHOD
Dimensions & Surface Quality				
1.	Deviation in length and width	± 0.8%	± 0.1%	ISO 10545-2
2.	Deviation in thickness	± 5%	± 2%	ISO 10545-2
3.	Deviation in Straightness of sides	± 0.5%	± 0.1%	ISO 10545-2
4.	Deviation in Rectangularity	± 0.8%	± 0.1%	ISO 10545-2
5.	Deviation in Surface Flatness	± 0.5%	± 0.1%	ISO 10545-2
6.	Surface Quality (R)	Minimum 95%	No visible defects	ISO 10545-2
Physical characteristics				
7.	Scratch Hardness of surface Moh's scale	Min. 6	Min. 7	ISO 10545-3
8.	Water absorption	± 0.5%	± 0.05%	ISO 10545-3
9.	Moisture Expansion	NIL	NIL	ISO 10545-10
10.	Surface Abrasion Resistance	max 175mm ²	± 146mm ²	ISO 10545-7
Mechanical characteristics				
11.	Breaking strength	1300 N	± 2200 N	ISO 10545-4
12.	Modulus of rupture	≥ 35 N/mm ²	≥ 35 N/mm ²	ISO 10545-4
13.	Impact resistance	Declared by manufacturer	no indentation or cracking	ISO 10545-5
Safety characteristics				
14.	Density	2.20 gm/cc	2.34 gm/cc	DIN 51082
15.	Skid resistance	-	More than R10 (80x60cm x 9.7mm)	DIN 51130
Thermo photo characteristics				
16.	Thermal shock resistance	Resistant to 10 cycles	Pass min to 10 cycles	ISO 10545-9
17.	Co-efficient of thermal expansion	9x10 ⁻⁶ /°C Max	<8x10 ⁻⁶ /°C Max	ISO 10545-8
18.	Frost resistance	Resistant	Resistant	ISO 10545-12
19.	Color Resistance to UV light	Resistant	Resistant	ISO 10545-16
Chemical characteristics				
20.	Stain Resistance	Resistant	Resistant	ISO 10545-14
21.	Chemical Resistance HOUSEHOLD CHEMICAL & SWIMMING POOL SALT	min class-UB	Conform to classes-UA	ISO 10545-13
22.	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	min class-ULB	Conform to classes-ULA	ISO 10545-13
23.	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	min class-ULB	Conform to classes-UHA	ISO 10545-13

PACKING DETAILS

S. No.	Dimensions (mm)	No. of Tiles / box	Coverage Area
1.	300x1000	4 Pcs.	1.20 Sq. Mtr.
2.	300x1200	4 Pcs.	1.44 Sq. Mtr.
3.	600x1200	2 Pcs.	1.44 Sq. Mtr.

* Vitrified tiles have resistance to most of the stains/chemicals but it is recommended to take due care while laying and for day-to-day maintenance.
Resistance to acids & alkalis (Exception Hydrofluoric Acids & its Compounds)

- Colours in the catalog are as accurate as printing process allows
- Sizes mentioned in the catalog are the nominal sizes only.
- Conforming to ISO requirements, technical specifications for Kajaria tiles are applicable only for 1st quality tiles.
- Please inspect all tiles prior to installation; company will not entertain complaints, once tiles are laid / fixed.
- For better laying, please follow the instructions on the packaging box.

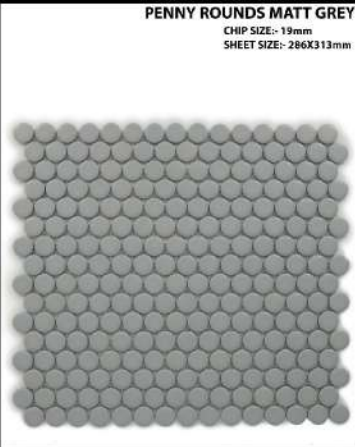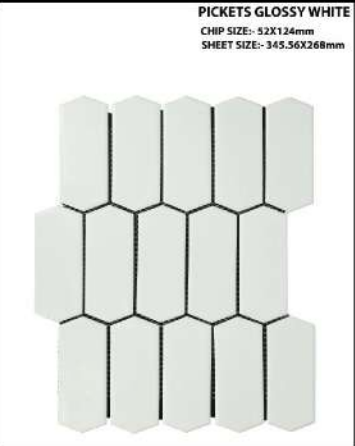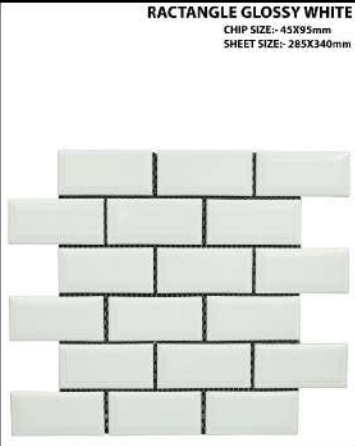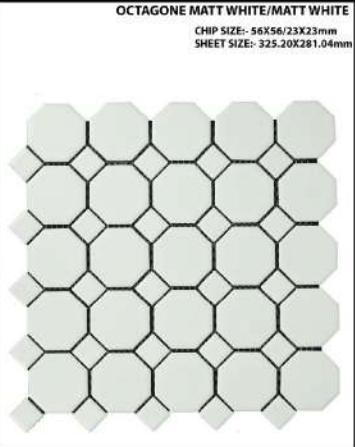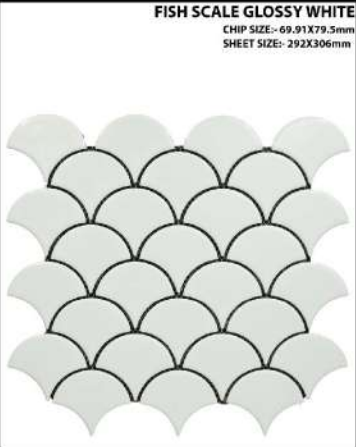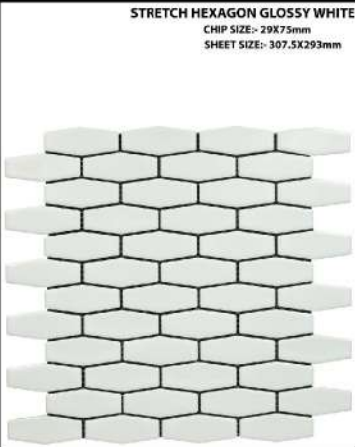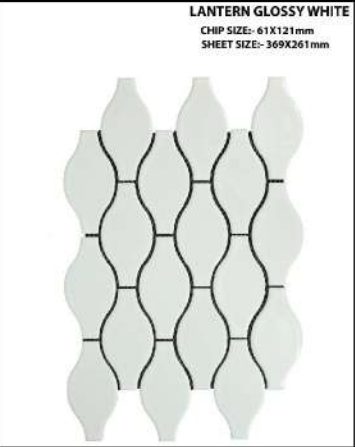




Dream House

Building Materials Trading L.L.C

ORGANISATION CHART

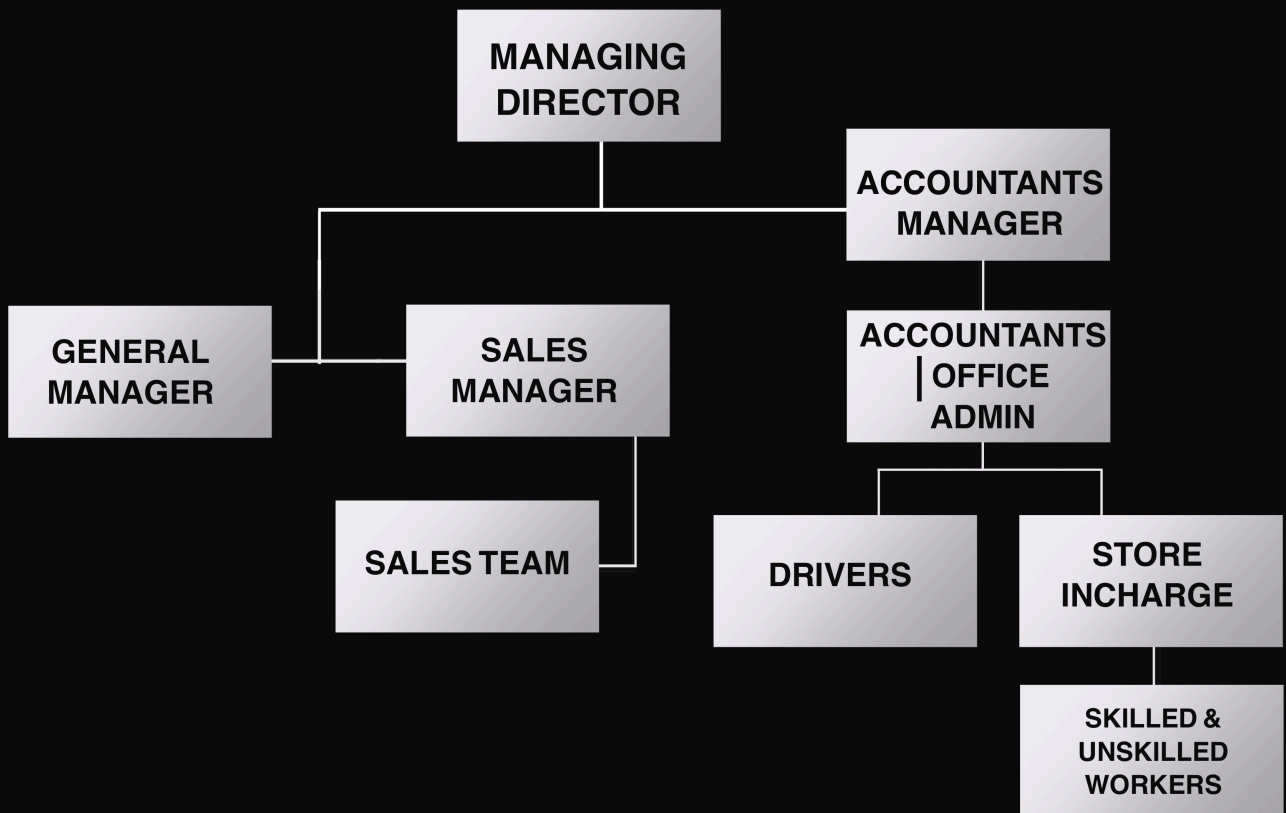



Dream House

BUILDING MATERIALS TRADING LLC

Since 2008

TRADE LICENSE & REGISTER



رخصة تجارية
Trading License



600529

License Details

تفاصيل الرخصة

Issue Date	29-06-2009	تاريخ الإصدار	License No.	600529	رقم الرخصة
Expiry Date	28-06-2025	تاريخ الإنتهاء	Registration No.	10700	رقم السجل
بيت الحلم لتجارة مواد البناء ذ م م					الاسم التجاري
Trade Name	DREAM HOUSE BLDG.MAT.TR.L L C.				
Legal status	Limited Liability Company	شركة ذات مسؤولية محدودة			الشكل القانوني

License Members

أطراف الرخصة

الحصص	الصفة	رقم الهوية / الجواز	الجنسية	اسم المستثمر	رقم المستثمر
Shares	Type	ID \ Passport No	Nationality	Investor Name	Investor No
51.0 %	شريك Partner	784198126042492	الإمارات UAE	محمد سالم حميد سالم الغماي MOHAMED SALEM HUMAID SALEM ALGHAMMAI	102020
25.0 %	شريك Partner	784197925209716	الهند India	عبدالعزیز اراتوفايلیل موسى ABDUL HAZEES ARATTU VAYALIL MOOSA	69717
24.0 %	شريك Partner	784197583820614	الهند India	جامسيد كانان تودوكاييل مuthirakalayil موسى JAMSID KANNAN THODUKAYIL MUTHIRAKALAYIL MOOSA	4798090

المدير	عبدالعزیز اراتوفايلیل موسى
أنشطة الرخصة	بيع مواد البناء - بالتجزئة
العنوان	الشارقة-الصجعة صناعية/الشارقة-- خلف شارع الذيد محل رقم 1 ملك راشد خميس حمد راشد السويدي
الهاتف المتحرك:	0559519123
صندوق البريد:	الشارقة 98197
البريد الإلكتروني:	dreamhouseuae@gmail.com



User Name 10000019

رقم المستخدم

Printing Date 16-07-2024

تاريخ الطباعة

- This document is official. It doesn't need to be stamped or signed.

To view license details please visit SEDD web site: www.sedd.ae

- It is prohibited to distribute advertisements in public places and residential areas.

- هذه الوثيقة رسمية ولا تحتاج لختم أو توقيع.

للتأكد من صحة البيانات يرجى زيارة موقع الدائرة: www.sedd.ae

- يمنع توزيع الإعلانات في الأماكن العامة والأحياء السكنية.



شهادة سجل تجارية
Trading Register Certificate



600529

License Details

تفاصيل الرخصة

Issue Date	29-06-2009	تاريخ الإصدار	License No.	600529	رقم الرخصة
Expiry Date	28-06-2025	تاريخ الإنتهاء	Registration No.	10700	رقم السجل
			Capital	150000	رأس المال
				بيت الحلم لتجارة مواد البناء ذ م م	الاسم التجاري
Trade Name	DREAM HOUSE BLDG.MAT.TR.L L C.				
Legal status	Limited Liability Company		شركة ذات مسؤولية محدودة		الشكل القانوني

المدير	عبدالعزیز اراتو فاياليل موسى
أنشطة الرخصة	بيع مواد البناء - بالتجزئة
العنوان	الشارقة-الصجعة صناعية/الشارقة-- خلف شارع الذيد محل رقم 1 ملك راشد خميس حمد راشد السويدي



User Name 10000019 رقم المستخدم Printing Date 16-07-2024 تاريخ الطباعة

- This document is official. It doesn't need to be stamped or signed.

To view license details please visit SEDD web site: www.sedd.ae

- It is prohibited to distribute advertisements in public places and residential areas.

- هذه الوثيقة رسمية ولا تحتاج لختم أو توقيع.

للتأكد من صحة البيانات يرجى زيارة موقع الدائرة: www.sedd.ae

- يمنع توزيع الإعلانات في الأماكن العامة والأحياء السكنية.



شهادة سجل تجارية
**Trading Register
Certificate**



License No. 600529
Expiry Date 2024/06/28
Capital 150000

Trade Name DREAM HOUSE BLDG.MAT.TR.L L C.
Legal status Limited Liability Company

رقم الرخصة Registration No. 10700
تاريخ الإنتهاء Issue Date 2009/06/29
رأس المال

تفاصيل الرخصة License Details

رقم السجل
تاريخ الإصدار
الاسم التجاري بيت الحلم لتجارة مواد البناء ذ م م
الشكل القانوني شركة ذات مسؤولية محدودة
المدير عبدالعزيز اراتو فاباليل موسى
أنشطة الرخصة بيع مواد البناء - بالتجزئة
العنوان الشارقة-الصنعة الصناعية/الشارقة-- خلف شارع الذيد -محل رقم 1 ملك راشد خميس حمد راشد السويدي



2023/06/21


تاريخ الطباعة

39795

رقم المستخدم

- This document is official. It doesn't need to be stamped or signed.
To view license details please visit SEDD web site: www.sedd.ae
- It is prohibited to distribute advertisements in public places and residential areas.
- A permit is required when conducting any promotion.

- هذه الوثيقة رسمية ولا تحتاج لختم أو توقيع.
للتأكد من صحة البيانات يرجى زيارة موقع الدائرة: www.sedd.ae
- يمنع توزيع الإعلانات في الأماكن العامة والأحياء السكنية.
- يلزم استخراج تصريح عند إجراء أي عروض ترويجية.

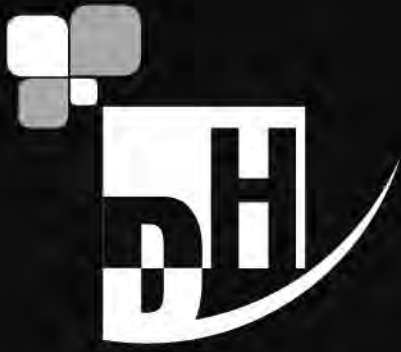

Dream House

BUILDING MATERIALS TRADING LLC

Since 2008

CHAMBER OF COMMERCE

شهادة تسجيل عضوية لعام
Membership Registration Certificate For Year

[2019]

إن غرفة تجارة وصناعة الشارقة بناءً على قانونها رقم (٩) لعام ٢٠١٨م
Sharjah Chamber of Commerce and Industry according to the law no. (9) 2018

بيت الحلم لتجارة مواد البناء ذ م م

DREAM HOUSE BLDG.MAT.TR.L L C.

قد سجلت

:Company Name

600529

رقم الترخيص :

:License NO

089150

رقم العضوية :

:Membership Number

10700

رقم السجل التجاري :

: Commercial Registration NO

الامارات

الجنسية :

:Nationality

الممتازة

الفئة :

: Category

شركة ذات المسؤولية
المحدودة (ذ.م.م.)

الشكل القانوني :

: Legal Form

جنسية الشركاء :

: Partners Nationality

الامارات, الهند, الهند

الشارقة-صناعية رقم 4/الشارقة-خلف شارع الملك فيصل-شيرة رقم 10 مكتب ملك محمد ناصر العويس وشركة

العنوان :

: Address

تجارة مواد البناء

لممارسة نشاط :

: Activity

تجارة مواد البناء

ملاحظات :

: Remarks

SEDD

تاريخ الإنتهاء
28/6/2020



تاريخ الإصدار

29/6/2009



M 044481



Dream House

BUILDING MATERIALS TRADING LLC

Since 2008

**TAX REGISTRATION
NUMBER**



شهادة تسجيل لضريبة القيمة المضافة في الامارات العربية المتحدة
Certificate of Registration for Value Added Tax in the United Arab Emirates

The Federal Tax Authority certifies that the entity below is
a registered person for Value Added Tax in the UAE

تشهد الهيئة الاتحادية للضرائب أن الجهة التالية مسجلة لضريبة القيمة
المضافة في الامارات العربية المتحدة

Full Arabic legal name	بيت الحلم لتجارة مواد البناء ذ.م.م	الاسم القانوني الكامل باللغة العربية
Full English legal name	DREAM HOUSE BLDG. MAT.TR.L L C.	الاسم القانوني الكامل باللغة الانجليزية
Registered address	SHOP nO.4 aLSHAMS bUILDING, MUWAILA, SHARJAH, Sharjah, United Arab Emirates, 98197, +971559519123	العنوان المسجل
Tax Registration Number	100340803400003	رقم التسجيل الضريبي
Effective Registration Date	01/01/2018	تاريخ التسجيل الفعلي
First VAT Return Period	01 Jan 2018 - 30 Apr 2018 and quarterly thereafter	فترة أول إقرار لضريبة القيمة المضافة
VAT Return due date	28 May 2018	تاريخ استحقاق إقرار ضريبة القيمة المضافة

Start and end dates of Tax periods: 1 Feb to 30 Apr, 1 May to 31 July, 1 Aug to 31
Oct, 1 Nov to 31 Jan

بداية ونهاية الفترات الضريبية

يرجى التأكد من صحة تفاصيل الشهادة. يجب إبلاغ الهيئة الاتحادية للضرائب في حال تغيير الاسس التي حصلت فيها على رقم التسجيل
الضريبي الخاص بك.

Please check that the details on this certificate are correct. You must inform the Federal Tax Authority of any change on the
basis of which you obtained your Tax Registration Number.



Issuing Date:

19/03/2018

تاريخ الإصدار

ONGOING PROJECTS






PROJECT



Location : Dubai
Client : JVC Segrex
Consultant : Al Awaj consul.
Contractor : Aroma cont.

SEGREG 1&2 JVC (G+10+10+R)

Products used.

- Dry Area All Apartment floor—ZH12097 1200x1200mm - 
- Wet Area Bathroom floor — ZH12097 600x600mm - 
- All Service area floor — Crest gris 600x600mm - 
- Stair case Step & Riser — Crest gris step 1200x300mm - 
- Landscape & Planter — Travertine 600x120mm - 

PROJECT



Location : Dubai
 Client : Ellington
 Consultant : Federal Eng.
 Contractor : Gulf Asia Cont.

Ellington JVC Portman (G+3P+16)

Products used.

- Dry Area Apartment floor – DV.Port wood 1200x200mm -
- Dry Area Corridor floor – Nova Bianco 600x600mm -
- Wet Area Bathroom floor – DV.Port Beige 600x600mm -
- Wet Area Bathroom wall – Comphy white 300x600mm -
- Wet Area Shower wall – Brick Born Mosaic 300x600mm -





PROJECT




Location : Dubai
 Client : Ellington Prop.
 Consultant : Al jadeed cons.
 Contractor : Aroma Cont.

KENSINGTON WATERS

Products used.

- **Landscape area – Granite Crema** 16mm 600x600mm -
- Granite Sahara** 16mm 600x600mm -
- Granite Nero** 16mm 600x600mm -
- **Wet Area Bathroom wall – Kit–Kat Mosaic white** 22x120mm -
- **Swimming pool tile – Granite crema** 9mm 600x600mm -









PROJECT



Location : Dubai
Client : Ellington Prop.
Consultant : A.D.U.
Contractor : Al Rakha Cont.

ELLINGTON ARBOUR VIEW

Products used.

- Dry Area All Apartment floor – Granite crema 600x600mm - 
- Wet Area Bathroom floor – Granite crema 600x600mm(R-10) - 
- Wet Area Bathroom wall – Granite crema 300x600mm(R-10) - 
- Wet Area Shower wall – Mosaic granite crema 300x300mm - 



PROJECT



Location : Palm jumeirah, Dubai
Client : Ellington Prop.
Consultant : ADU.
Contractor : Al Rakha Gen Cont.


ELLINGTON BEACH HOUSE (B+G+7)

Products used.

- Landscape Pathway floor – Granite crema Granite Nero
Fabricated -




- Landscape Planter area wall – Granite gris 600x1200mm -



Granite Blanco 600x1200mm -




Core blanco 600x1200mm -



- Swimming pool mosaic fabricated – mosaic sheet 300x300mm -



Core blaco 600x1200mm -



PROJECT



Location : Dubai
Client : Ellington Prop.
Consultant : BSBG.
Contractor : Aroma contr.

Upper House East & West Tower

Products used.

- Dry Area balcony floor – Savana ash. 1200x200mm (R-10) -
- Wet Area Bathroom floor – Quarry Bianco 600x600mm (R-10) -
- Wet Area Bathroom wall – Quarry Bianco 300x600mm (R-9) -
- Wet Area Shower wall – Quarry steel decor 300x600mm(R-9) -
- All Service area – Comphy white 300x600mm -
- Changing room floor – Quarry steel 600x600mm(R11) -
- Changing room wall – Quarry steel 300x600mm -





PROJECT



Location : Dubai
Client : Park Hyatt
Contractor : Mouhajer cont.

PARK HYATT DUBAI

Products used

- Wall decor – Design tiles 200x200mm -








PROJECT



Location : Dubai
Client : Ellington Prop.
Consultant : Federal Eng.
Contractor : Al Ashram cont.

BELGRAVIA RESIDENTIAL BUILDING - 4 (G+3P+13F)

Products used.

- Dry area corridor – Verde plain 600x600mm - 
- Wet Area Bathroom wall – Comphy white 600x1200mm - 
- Wet area Bathroom wall – Comphy white highlighter 600x1200mm - 

PROJECT





Location : Dubai
 Client : Ellington Prop.
 Consultant : Model Eng.
 Contractor : Al Adrak Cont.

ELLINGTON HOUSE 3 & 4

Products used.

- Dry Area common floor – Armani Grey 600x1200mm -
- Dry Area Balcony floor – Regal wood beige 200x1200mm -
- Wet Area Bathroom floor – Armani Grey 600x600mm -
- Wet Area Bathroom wall – Armani Dark Grey 600x600mm -
- Wet Area shower wall – Armani Grey Decore 300x600mm -








PROJECT



Location : Dubai
Client : Prescott
Consultant : Msquare cons.
Contractor : SKR Building.

PRESCOTT DEVELOPMENTS (G+6+R)

Products used.

- Landscape area & Planter – Granite Sahara 600x600mm - 
- Staircase step & Riser – Crest Pluto 300x600mm - 
- Staircase Landing – Crest Pluto 600x600mm - 

PROJECT



Location : Dubai
 Client : Ellington Prop.
 Consultant : Gulf engineering.
 Contractor : Aroma cont.

HIGHBURY RESIDENTIAL APARTMENT (G+1P+ +29+MF+R)

Products used.

- Wet Area Bathroom wall – Kit–kat mosaic 22x150mm - 
- Kitchen Backsplash wall – Brick Born Mosaic 300x600mm - 
- Landscaping Area – Core Bianco 600x600mm - 
- Core Sahara 600x600mm - 
- Core Gris 600x600mm - 
- Core Nero 600x600mm - 
- Wet Area Bathroom wall Brick Born Mosaic 300x600mm - 
- Wet Area Bathroom wall – Boost beige mosaic 315x322mm - 







PROJECT



Location : Dubai
Client : Ellington Prop.
Consultant : Model Eng.
Contractor : Al Ashram contr.

ELLINGTON BEACH HOUSE 1 & 2

Products used.

- Dry Area Common Floor – Armani light grey 600x600mm - 
- Dry Area All Apartment Floor – Armani light grey 1200x600mm - 
- Dry Area Service Corridor – Armani dark grey 300x600mm - 
- Wet area bathroom wall – Armani dark grey 235x600mm - 
- Changing room floor – Plain white 600x300mm - 
- Changing room wall – Plain white 1200x600mm - 



PROJECT



Location : Dubai
Client : Serenia residences.
Consultant : Godwin austin arc.
Contractor : Khan saheb eng.

Serenia Living (PT-103)

Products used.

- Dry Area Floor — Core gris grey 600x600mm -





PROJECT



Location : Dubai
Client : Ellington Prop.
Consultant : Al awaj.
Contractor : Allied cont.

ELLINGTON BELMOND RESIDENCE

Products used kitchen Kitchen, Pantry, Garbage room

- **Brick mosaic white 285x340mm -**





Dream House
Building Materials Trading LLC

COMPLETED PROJECTS



PROJECT



OFF CAMPUS STUDENT HOUSING (G+5+ROOF+7)

Location : Academic City-Dubai
 Client : FIM Partners
 Consultant : Face architecture
 Contractor : Aroma contracting



PROJECT



OPUS HOTEL

Location : Dubai
Client : Omniyat
Consultant : Zaha Hadid Architecture
Contractor : Bond Interiors

PROJECT



SOUTH VIEW SCHOOL

Location : Dubai
Client : SVS
Consultant : CEC
Contractor : Global Green Bridge

PROJECT



JSS SCHOOL G+3+R

Location : Dubai
Client : JSS Academy FZ. LLC
Consultant : Al Saraya
Contractor : Global Green Bridge

PROJECT



DELHI PRIVATE SCHOOL

Location : Ras al Khaima
 Client : Delhi Private School
 Consultant : Home of Architecture
 Contractor : High Star Contracting



Dream House

BUILDING MATERIALS TRADING LLC

Since 2008

TECHNICAL SUBMITAL APPROVALS


[illegible]

COMMENTS SHEET

COMMENTS SHEET					
Project	DXB-237-Portman				
Project Name	Residential Building (G+3P+16F+R)-Plot No. JVC12PHRS003				
Client	Ellington Properties Development				
Consultant	Federal Engineering Consultants				
Contractor	Gulf Asia Contracting	Reference	GAC-7917-TPM-MS-CIVIL-048	Rev.	00
Submittal type	Material submittal	Receiving Date	1/08/2024		
Subcontractor/supplier	DREAM HOUSE BUILDING MATERIALS TRADING LLC				
Submission Details	KITCHEN BACK SPLASH TILES – TL06				
Submittal Status	Approved with Comments				

Comments:

1. To comply with approved sample by client.
2. To comply with project specs & ID drawings.
3. Sample to be submitted for approval (comply with arch specs Sec. 093013 – Item 1.4)
4. Contractor to submit detailed shop drawings and method statement for review and approval.
5. MIR to be submitted upon delivery at site.
6. Mock up to be provided at site for approval.
7. Chipped edges will not be accepted & joints to be aligned properly.
8. Warranty draft to be submitted (5 years as per project specs)

	Name	Signature	Date
Commented by	Mostafa Mohammed		
Resident Engineer	Amr Fathy		
Received by			

JOSEPH THOMAS
DEEPAK JAGJIVAN
KIRTI DHAKAN

ELLINGTON

FEDERAL
ENGINEERING CONSULTANTS

شركة الخليج اسيا للمقاولات
GULF ASIA
Contracting Co. LLC
P.O. Box 420550, P.O. Box 420550, P.O. Box 420550, P.O. Box 420550, P.O. Box 420550
Email: gac@ga.com Website: www.gac.com

PROJECT: The Portman -Storey Residential Building (G+3P+16 F)

Plot no. :JVC12PHRS003 - JVC -Dubai

Client Comments on Submittal

SN	Description	No. of Copies	Ref.	Rev.	Status
1	Material Submittal for Kitchen Backsplash Tiles-TL 06	1 (Soft Copy)	GAC-7917-TPM-MS-CIVIL-052	0	

Sample is not provided.

Material will be reviewed upon sample approval

Client Representative

Name :

Signature :

2 Aug 2024

	ADDRESS HILLCREST P287 - PA21 VILLAS	EMAAR Development P.J.S.C.
	Internal finishes coordination meeting no.01 For Club House	

MINUTES OF MEETING

Date:09.07.2024


1) Meeting Attendees

Company/Name	Mobile No.	E-mail address
EMAAR		
Max Wilschefska		mwilschefska@emaar.ae
Jacqueline Lee Shaddock		JShaddock@emaar.ae
X-ARCHITECTS		
Ammar Aljuboori	050-561 9565	ammar@x-architects.com
Mohamed Tarhini	052 312 1220	tarhini@x-architects.com
AROMA		
Simon Soger	056 216 1025	simon.sogers@aromacontracting.com
Thomas Thadathil	054 994 4478	thomastt@aromacontracting.com
Aftab Ghorl	056 2164797	aftab.ghori@aromacontracting.com
UGARIT INTERNATIONAL FURNITURE		
Benny P	050 7892984	Benny.P@ugarit.ae
ST STYLE		
Rajeev Yadav	050 6541067	rajeev@ststyle.me

2) Technical Discussions:

#	ITEM	COMMENTS/CONFIRMATION
1	Porcelain tiles (CT-104 & CT-106)	As per Sample checking, EMAAR ID has selected. <ul style="list-style-type: none"> CT-104: Same as external porcelain tile F3 of clubhouse (1200mm x 600mm) CT-106: Same as external porcelain tile F3 of clubhouse (600mm x 600mm for floor and wall)
2	LVT and Rubber flooring	As per Sample checking, EMAAR ID has selected. <ul style="list-style-type: none"> LVT: Model SX5W2655 Soft Oak (Specified supplier) Rubber flooring: Ultimate Calgary (same as specification) MT-105: transition trim approved / bigger size is required.
3	Mirrors	As per Sample checking, EMAAR ID selected. <ul style="list-style-type: none"> Gym mirror - approved Vanity mirror (same as villa)
4	Wood veneer (WD-102), ceiling wood slots (CL-104) and laminate finish (LP-103)	As per Sample checking, EMAAR ID has requested. <ul style="list-style-type: none"> WD-102 & CL-104: veneer finish shall be used - to match color with selected LVT sample (soft oak) LP-103 – To have closest match with the selected LVT sample
5	Reconstituted stones (ST-101, ST-104 & ST-107)	As per Sample checking, EMAAR ID has selected. <ul style="list-style-type: none"> ST-101 & ST-104: Same as villa ST-107: sample Approved.

*Attached photos for clarifications

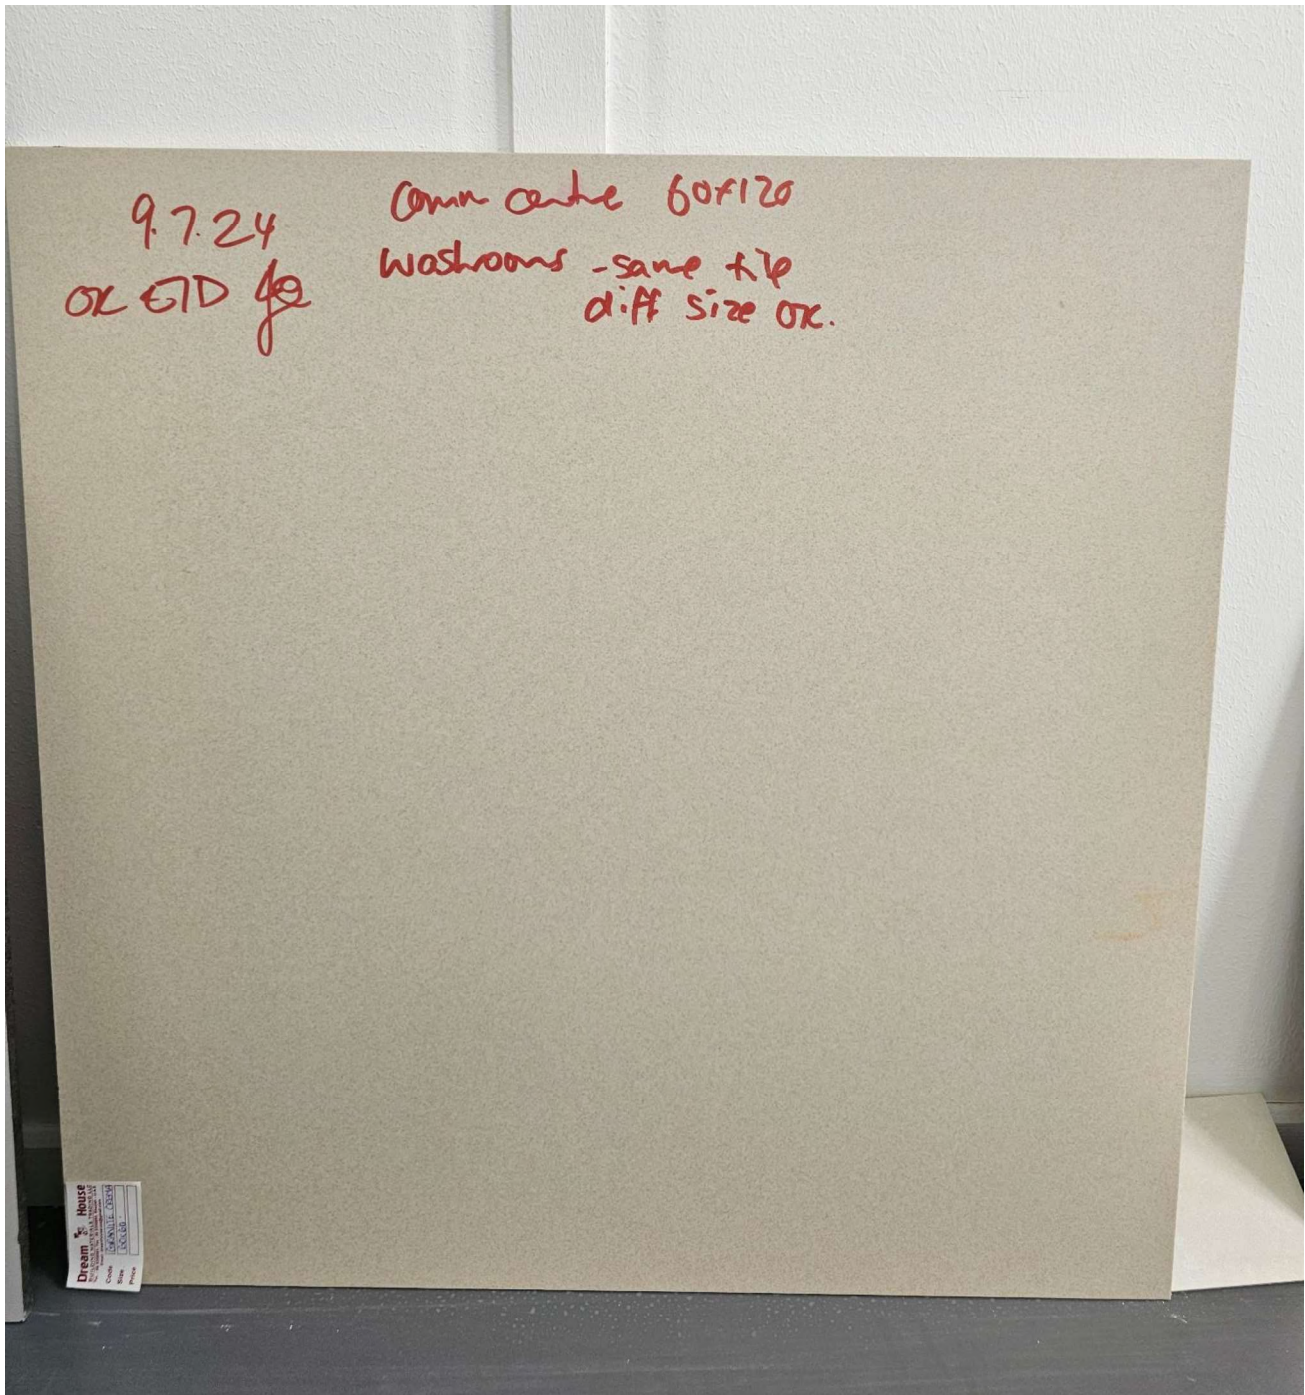

Project		DXB-221 - HAMILTON HOUSE - RESIDENTIAL BUILDING G+P+5 WITH RETAIL @ GF, AT JVC14PMRA007, JUMEIRAH VILLAGE CIRCLE, DUBAI, UAE							
SAMPLE SUBMITTAL									
Submittal No.		HH-SAM-CVL-070		Rev		00		<input checked="" type="checkbox"/> New submittal <input type="checkbox"/> Re-submittal	
Date		14-02-2024							
Material Description		SAMPLE SUBMITTAL FOR MOSAIC WALL TILE 30X30 CM (A-WL-02) M/S DREAM HOUSE							
Country of Origin		UAE		Specified		Alternative		<input checked="" type="checkbox"/> Architecture <input type="checkbox"/> Structure <input type="checkbox"/> Electrical <input type="checkbox"/> Mechanical <input type="checkbox"/> Other	
Manufacturer		Local Supplier/Agent		Details					
Name		OASIS VITRIFIED PVT LTD		M/S DREAM HOUSE		AREA OF APPLICATION: BATHROOM, POWDER ROOM			
Tel		065356681		PRODUCT NAME: NIOS THUNDER					
Fax		98197							
PO Box		dreamhouseuae@gmail.com							
Email:									
BOQ		BS		Specs					
Drawings ref.									
Attached		Data Sheet		Sample		Catalogue		Profile	
QA/QC		Name		Signature		Deputy Project Manager		Name	
		Engr. Anthony Selvam				Engr. Shivakumaran			
Name		Signature		Date					
Received by Consultant Consultant Comments: * Refer to & comply with comments on attached sheet * Material submittal to be submitted for final Review & approval.									
Approved		Approved With Comments		More Information Required		Rejected			
		Name		Signature		Date			
Commented by		Engr.M.Ramadan							
QA/QC									
Project Manager		Engr.Haitham Elattar				16/2/24			
Received Back By the contractor									

ANTHONY ARULRAJ, ARJUN
CHARANDAS KHATRI, ARUN
KUMAR AGGARWAL
KASTURILAL & JOSEPH
THOMAS MANGALA VEETIL
CHACKO THOMAS

ELLINGTON

FEDERAL
ENGINEERING CONSULTANTS

TGC THE GATE
CONSTRUCTION

PROJECT: Hamilton House - Residential Building G+P+S with retail @ Ground Floor
Plot: JVC14PMRA007, at Jumeirah Village Circle - Dubai

Client Comments on Submittal

SN	Description	No. of Copies	Ref.	Rev.	Status
1	Sample Submittal for: Mosaic Wall Tile 30X30CM (A-WL-02)	1 (Soft Copy)	HH-SAM-CVL-070	0	B.

- Sample is approved



- Material submittal with technical data sheet to be submitted

Client Representative

Name :

16 Feb 2024

Signature :

<p>HAMILTON HOUSE PROJECT PRODUCT NAME: MIDS THUNDER SIZE MECH: 30x30 CM 3MM GRP BRUNT SFE LOCATION: BATHROOM & POWDER ROOM</p>	<p>APPROVED 31/01/24   15/2/24 FUTURE WALL</p>
<p>TILES RATING: R9 THICK: 8.5MM THICK. SUPPLIER: ROOM HOUSE</p>	<p>* Ensure joints are aligned properly. * <u>Edges chips</u> will not be acceptable.</p>



From: M/s. : Architectural Design Unit	Project : PJCRC32A_32H- (B+G+7)	
	Project Location PALM JUMEIRAH, DUBAI, UAE	
	Trans. No.: ADU/ELN/0157-R1/2023	Date : 01-Nov-23
To: M/s. Ellington Properties Development LLC		
Attn.: Mr.Basil - Mr. Emeel - PM		

☐ Action

☐ Comments

☒ Approval

☐ Information

☒ Construction

☒ Record

☐ Additional Copy

☐ Issued as noted

1 ☐ Drawings A1 Size
2 ☐ Presentation Drawings
3 ☐ A4 Paper
4 ☒ Presentation Board
5 ☐ Marble Sample

<input checked="" type="checkbox"/> Arch.	<input type="checkbox"/> Elec.
<input type="checkbox"/> Struc.	<input type="checkbox"/> Landscape
<input type="checkbox"/> A/C	<input checked="" type="checkbox"/> I.D.
<input type="checkbox"/> Plumbing	<input type="checkbox"/> Finance

[illegible]

Anup Shekar
Resident Engineer



01-Nov-23



REFERENCE IMAGES

GRADUAL RANDOMIZATION, CHEVRON PATTERN



PER OUR TILE COLOR SELECTION, THE DARK COLOR IN THE REFERENCE IMAGE TO BE (TILE NO. 1 IN THE SAMPLE BOARD PHOTO), AND THE LIGHT TILE IN THE REFERENCE IMAGE TO BE (TILE NO. 2 IN THE SAMPLE BOARD PHOTO).



Dream House

BUILDING MATERIALS TRADING LLC
email : dreamhouseuae@gmail.com
Tel: 06 7674734 | Mob: 055 9519123

EPH
UR-ABC-10004-01
MSH-0114


Floor & Wall Solutions



02




03



01



04





Project No. P-656 (P235)

Project Details: "Ellington House" - Construction of G+P+12 Residential Building on Plot No. 6317636 (DHE.13.0008) at Hadaeq Sheikh Mohammed Bin Rashed, Dubai, UAE

MATERIAL SUBMITTAL

Contractor:	Al Ashram Contracting LLC	Consultant:	Model Engineering Consultants
Address:	P. O. Box: 1290, Dubai, UAE	Address:	P. O. Box: 26369
	Tel: 04 558 4000		Tel: 04 - 3266625

Sub-Contractor: Inventure Metal Products Industries LLC
Address: P.O. Box 30667 Dubai, UAE

Date submittal prepared: 15-Feb-24

Submittal Ref: AAC-235-MAT-CIV-182 Rev. No. 01

Material description:

TL-12 : Porcelain Tile at Staircase 03

Catalogue Ref:

Manufacturer:	Dream House UAE	Supplier:	Dream House UAE
Address:		Address:	
Location:	Dubai, UAE	Production period:	Weeks
Spec. Ref:		Delivery Ex-works:	Weeks
BOQ Ref:		Total Delivery time:	Weeks
Date Material required at site:		Expected date of delivery to site:	

Delivery method:

☒ Overland☐ Sea Freight☐ Air Freight

Contractor's comments:

AL ASHRAM CONTRACTING L.L.C.
P-235 on Plot No. 6317636

21 FEB 2024

RECEIVED ON WITHOUT PREJUDICE BASIS
CONTENTS SUBJECT TO VERIFICATION

By:

If alternate Material submitted, attach full comparison to that specified

Attachments/Enclosures:

☒ Catalogues☒ Drawings☐ Samples

	Other
FOR ACKNOWLEDGEMENT ONLY	
Received By:	<u>Gad</u>
Name:	
Signature:	<u>[Signature]</u>
Date:	<u>15/2/24</u>
	<input type="checkbox"/> Other

Contractor's Authorized
Signature: [Signature]

Date: 15-Feb-24

Engineer's Comments:

- MIR to be Submitted Upon Material delivery
- Subjected to Sample approval
- SD to be submitted for approval
- Refer to Comments on physical sample.

☐ Archt.
☐ Str. Engr.
☐ M. Engr.
☐ E. Engr.

Status

☐ (A) Approved☒ (B) Approved with comments☐ (C) Revise & Resubmit☐ (D) Rejected

Project Manager:

Date:

Engineer: [Signature]

Date:

[Signature]

15-Feb-24

Date: 15/2/24

ELLINGTON



الأشهر للمقاولات ش.ذ.م.م.
AL ASHRAM CONTRACTING L.L.C.



Project No. P-656 (P235)

Project Details: "Ellington House" - Construction of G+P+12 Residential Building on Plot No. 6317636 (DHE.13.0008) at Hadaeq Sheikh Mohammed Bin Rashed, Dubai, UAE

MATERIAL SUBMITTAL

Contractor: Al Ashram Contracting LLC		Consultant: Model Engineering Consultants	
Address: P. O. Box: 1290, Dubai, UAE		Address: P. O. Box: 26369	
Tel: 04 558 4000		Tel: 04 - 3266625	
Sub-Contractor: CULTIVATE			
Address:			
Date submittal prepared: 10-FEB-24		Submittal Ref: AAC-235-MAT-CIV-182 Rev. No. 00	
Material description: TL-12 : PORCELAIN TILE AT STAIRCASE 03		Catalogue Ref:	
Manufacturer: DREAM HOUSE UAE		Supplier: DREAM HOUSE UAE	
Address:		Address:	
Location: Dubai, UAE		Production period:	
Spec. Ref:		Delivery Ex-works:	
BOQ Ref:		Total Delivery time:	
Date Material required at site:		Expected date of delivery to site:	
Delivery method:			
<input checked="" type="checkbox"/> Overland <input type="checkbox"/> Sea Freight <input type="checkbox"/> Air Freight <input type="checkbox"/> Other			
Contractor's comments:			
Submitted with ref to Nomination letter MZ0119-G01			
Attachments/Enclosures:			
<input checked="" type="checkbox"/> Catalogues <input type="checkbox"/> Drawings <input checked="" type="checkbox"/> Samples <input type="checkbox"/> Other			
Contractor's Authorized Signature: <i>[Signature]</i>		Date: 10-FEB-24	
Engineer's Comments:			
* Data sheet is provided only for 30x120x12.5 (Step up riser) and hence this approval is also only for it. * This is to be used only in treads of staircases. * Subject to sample approval.			
Status:			
<input type="checkbox"/> (A) Approved <input checked="" type="checkbox"/> (B) Approved with comments <input type="checkbox"/> (C) Revise & Resubmit <input type="checkbox"/> (D) Rejected			
Project Manager: <i>[Signature]</i>		Date: 13-Feb-24	
Engineer:		Date:	

الأشهر للمقاولات ش.ذ.م.م.
AL ASHRAM CONTRACTING L.L.C.
P-235 on Plot No. 6317636
13 FEB 2024
RECEIVED ON WITHOUT PREJUDICE BASIS
CONTENTS SUBJECT TO VERIFICATION

BY: *[Signature]*
FOR ACKNOWLEDGEMENT ONLY
Received By:
Name:
Signature:
Date: 10/02/2024

SD to be submitted for approval.

FULL BODY PORCELAIN STEP TILE

STEP UP PLUTO



PRODUCT CODE : STEP UP PLUTO

SIZE : 300X1200 MM

COLOR : PLUTO

TECHNOLOGY : FULL BODY PORCELAIN

SERIES : STEP UP SERIES

SURFACE LOOK : MATT

EDGE : RECTIFIED

THICKNESS : 12.5 MM

UNITY MEASURE : M2

ORIGIN : INDIA



Tread.

STEP-UP PLUTO

300 x 1200mm



CREST PLUTO

150 x 1200mm
600 x 600mm

TECHNICAL SPECIFICATION - FULL BODY VITRIFIED TILES

S. No.	CHARACTERISTIC	International Standards Group B1a- ISO 13006 Annex. G.	MEAN VALUE	TEST METHOD
Dimensions & surface Quality				
1.	Deviation in length and width	± 0.6%	± 0.1%	ISO 10545:2
2.	Deviation in thickness	± 5%	± 2%	ISO 10545:2
3.	Deviation in Straightness of sides	± 0.5%	± 0.1%	ISO 10545:2
4.	Deviation in Rectangularity	± 0.6%	± 0.1%	ISO 10545:2
5.	Deviation in Surface Flatness	± 0.5%	± 0.1%	ISO 10545:2
6.	Surface Quality (%)	Minimum 95%	No visible defects	ISO 10545:2
Physical characteristics				
7.	Scratch Hardness of surface Moh's scale	Min. 6	Min. 7	ISO 10545:3
8.	Water absorption	≤ 0.5%	≤ 0.05%	ISO 10545:3
9.	Moisture Expansion	Nil	Nil	ISO 10545:10
10.	Surface Abrasion Resistance	max 175mm ³	≤ 144mm ²	ISO 10545:7
Mechanical characteristics				
11.	Breaking strength	1300 n	≥ 2200 n	ISO 10545:4
12.	Modulus of rupture	≥ 35 N/mm ²	≥ 35 N/mm ²	ISO 10545:4
13.	Impact resistance	Declared by manufacturer	no indentation or cracking	ISO 10545:5
Safety characteristics				
14.	Density	2.20 gm/cc	2.34 gm/cc	DIN 51082
15.	Skid resistance	-	More than R10 (60x60cm x 9.7mm)	DIN 51130
Thermo photo characteristics				
16.	Thermal shock resistance	Resistant to 10 cycles	Pass min 10 cycles	ISO 10545:9
17.	Coefficient of thermal expansion	9x10 ⁻⁶ /°K 'Max	<6x10 ⁻⁶ /°K 'Max	ISO 10545:8
18.	Frost resistance	Resistant	Resistant	ISO 10545:12
19.	Color Resistance to UV light	Resistant	Resistant	ISO 10545:16
Chemical characteristics				
20.	Stain Resistance	Resistant	Resistant	ISO 10545:14
21.	Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	min class-UB	Conform to classes-UA	ISO 10545:13
22.	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	min class-ULB	Conform to classes-ULA	ISO 10545:13
23.	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	min class-ULB	Conform to classes-UHA	ISO 10545:13

PACKING DETAILS

S. No.	Dimensions (mm)	No. of tiles / box	Coverage Area
1.	300x1000	4 Pcs.	1.20 Sq. Mtr.
2.	300x1200	4 Pcs.	1.44 Sq. Mtr.
3.	600x1200	2 Pcs.	1.44 Sq. Mtr.

* Vitrified tiles have resistance to most of the stains/chemicals but, it is recommended to take due care while laying and for day-to-day maintenance.

Resistance to acids & alkalies (Exception Hydrofluoric Acids & its Compounds)

- Colours in the catalog are as accurate as printing process allows
- Sizes mentioned in the catalog are the nominal sizes only.
- Conforming to ISO requirements, technical specifications for Kajaria tiles are applicable only for 1st quality tiles.
- Please inspect all tiles prior to installation: company will not entertain complaints, once tiles are laid / fixed.
- For better laying, please follow the instructions on the packaging box.



Certificate No. : TC-4265

NATIONAL CERA LAB

CERAMIC LABORATORY

Shop No. 16, 17, Ground Floor, Daryatal Plaza,
Nr. Argil Ceramic, 8-A, N/H, Morbi - 363 642 (Guj.) INDIA.

Ph. : 02822 244049, Mo. : 98252 62649, 96622 97005, 98257 99418
E-mail : nationalceralab@rediffmail.com

As per all Countries Export report of Wall, Floor, Vitrified Tiles & Sanitary Wares

Ref. No. NCL/Glazed Vitrified Tile /ISO/08/215/2020-21
URL - TC626519000002007P

Date :
Aug. 10. 2020

Receive date of test sample :- 31.07.2020

Issued To
M/S DONATO VITRIFIED PVT LTD
8A N.H.; Lakhdhipur Road
Opp Lakhdhipur Village
Dist - Morbi ; Gujarat , India

Sample description and name Full Body Glazed Vitrified Tile "First Grade", Nominal size 1200x300x12.25 mm (Rectified)
as submitted by the party Sample not drawn by National Cera Lab.

Test desired As per Standard ISO 13006 : 2018 Group B1 a Annex G

A Dimensions and surface quality

- I Deviation in Length (l) & Width (w)
- II Thickness
- III Straightness of Sides
- IV Rectangularity
- V Surface Flatness
- VI Surface quality
- B Physical Property
 - I Water Absorption %
 - II Breaking Strength in N
 - III Modulus of Rupture (MOR) N/mm²
 - IV Resistance to surface abrasion
 - V Coefficient of Linear Thermal Expansion
 - VI Thermal Shock Resistance

- VII Crazing Resistance
- VIII Moisture Expansion (in mm/mm)
- IX Impact resistance
- X Scratch hardness of Surface (mohs scale)
- XI Bulk density , l/m³ (g/cc)

C Chemical Property

- I Resistance to Stain
- II Resistance to Low Concentration of acid and alkali
- III Resistance to High Concentration of acid and alkali
- IV Resistance to house chemical
- V Resistance to swimming pool salt
- VI Lead and Cadmium release

TEST REPORT

A Dimensions and surface quality

I Deviation in Length (l) & Width (w)

- 1 Length The deviation in mm of average size of each tile (2 sides) from the average of 10 test specimens (20 Sides)

Require	Test Method	Result
± 1 mm	ISO 10545 - 2	Avg+ 0.38 mm Avg - 0.00 mm Pass

- 2 Width The deviation in mm of the average size of each tile (2 sides) from the average of 10 test specimens (20 Sides)

± 1 mm	ISO 10545 - 2	Avg+ 0.00 mm Avg - 0.13 mm Pass
--------	---------------	---------------------------------------

II Thickness

The deviation in mm of average thickness of 10 tile from the work size thickness

Party given 10 Pices	± 0.5 mm	ISO 10545 - 2	Avg+ 0.01 mm
Thickness Average			Avg - 0.00 mm
12.25 mm 12.26 mm			Pass

III Straightness of Sides

Maximum deviation from straightness in mm related to the corresponding work size

±0.8 mm	ISO 10545 - 2	Max+ 0.12 mm Max - 0.14 mm Pass
---------	---------------	---------------------------------------

IV Rectangularity

Maximum deviation from rectangularity in mm related to the corresponding work size

±0.8 mm	ISO 10545 - 2	Max+ 0.16 mm Max - 0.18 mm Pass
---------	---------------	---------------------------------------

(Page 1 - 4)



NATIONAL CERA LAB

CERAMIC LABORATORY

Shop No. 16, 17, Ground Floor, Daryalal Plaza,
Nr. Argil Ceramic, 8-A, N/H, Morbi - 363 642 (Guj.) INDIA.

Ph. : 02822 244049, Mo. : 98252 62649, 96622 97005, 98257 99418
E-mail : nationalceralab@rediffmail.com

As per all Countries Export report of Wall, Floor, Vitrified Tiles & Sanitary Wares

Ref. No.

Date :

TEST REPORT

Aug. 10. 2020

		Test Method	Require	Result
V Surface Flatness				
(a) Centre Curvature		ISO 10545 - 2	± 1.8 mm	Max+ 0.16 mm Max - 0.00 mm
Centre curvature related to diagonal calculated from the work size.				
(b) Edge curvature			± 1.8 mm	Max+ 0.18 mm Max - 0.00 mm
Edge curvature related to the corresponding work size.				
(c) Warpage			± 1.8 mm	Max+ 0.17 mm Max - 0.00 mm Pass
Warpage related to diagonal calculated from the work size.				
VI Surface quality		ISO 10545 - 2	95%	100% free from defects Pass
Tested by the visually Minimum 95 percent of tile shall be free from visible defect that would impair the appearance of the major area of tiles. No any defect found in the tiles surface area and lot pass the test.				
B Physical Property				
I Water Absorption %		ISO 10545 - 3		Avg. 0.044% Max. 0.053% Pass
1	0.042 %			
2	0.043 %			
3	0.047 %			
4	0.037 %			
5	0.053 %			
Average 0.044 %				
II Breaking Strength In N		ISO 10545 - 4		Avg. 4954.03 N Min. 4906.83 N Pass
1	4906.83 N			
2	4916.67 N			
3	4981.57 N			
4	4987.47 N			
5	4942.23 N			
Average 4954.03 N				
III Modulus of Rupture (MOR) N/mm²		ISO 10545 - 4		Avg. 56.45 N/mm ² Min. 54.67 N/mm ² Pass
1	58.26 N/mm ²			
2	57.55 N/mm ²			
3	59.78 N/mm ²			
4	55.60 N/mm ²			
5	54.90 N/mm ²			
Average 56.45 N/mm ²				

Not less than 1300
Thickness ≥ 7.5 mm

Minimum 35
Individual minimum 32

(Page 2 - 4)

[Signature]
20/8/2020

NATIONAL CERA LAB

CERAMIC LABORATORY

Shop No. 16, 17, Ground Floor, Daryalal Plaza,
Nr. Argil Ceramic, B.A. N/H, Morbi - 363 642 (Guj.) INDIA

Ph : 02822 244040, Mo : 98262 62640, 98622 67066, 98267 96416
E mail : nationalceralab@gmail.com

As per all Countries Export report of Wall, Floor, Vitrified Tiles & Sanitary Wares

Ref. No.

Date :

TEST REPORT

Aug. 10, 2020

	Test Method	Require	Result
	ISO 10545-7		PEI Class - IV 2100 Revolution pass
IV Resistance to surface abrasion Visual failure was observed at 6000 revolution when the tiles were subjected to abrasion stage of 150,600,750,1500,2100, up to 6000 revolution, 2100 revolution pass			
V Coefficient of Linear Thermal Expansion Expansion from ambient temperature to 100°C (K - 1)	ISO 10545-8	0X10 ⁻⁶ Max	6.27x10 ⁻⁶
VI Thermal Shock Resistance 15/14h°C - 10cycle	ISO 10545-9	10 cycle, Min	Confirm
VII Cracking Resistance No crazing in two cycle one hour duration at a steam pressure of 750±20kpa 8 Nos of tiles were subjected to autoclaving at a steam pressure of 750±20 Kpa of saturated steam for two hour consisting of two cycle None of the tiles show any sign of the crazing on the glaze surface and the lot pass the test	ISO 10545-11	No Crazing in Two Cycle	Confirm
VIII Moisture Expansion (in mm/mm)	ISO 10545-10	0.02 mm/mm max	0.000 mm/mm max
IX Impact resistance Coefficient of restitution (COR)	ISO 10545-6	0.65 Min	0.87
X Scratch hardness of Surface (mohs scale)	IS 13630-13	5 moh's scal	5 Moh's
XI Bulk density , lin (g/cc)	ISO 10545-3	2.2 min	2.2879 g/cc
C Chemical Property			
I Resistance to Stain Red Paste in Light Oil (Fe2O3) Iodine in Alcohol 13g/l Olive Oil	Stain put on tiles up to 24 hrs Stain removed by weak cleaning agent Stain removed by strong cleaning agent Stain removed by hot water	ISO 10545-14 Min Class - 3 Min Class - 3 Min Class - 3	Class - 4 Class - 3 Class - 5
II Resistance to Low Concentration of acid and alkali			
a Hydrochloric Acid solution 3% (V/V)	No visual changes observed after immersion for 4 days, pencil line removed with soft wet cloth	ISO 10545-13 Min Class-GLC	Class GLA
b Citric Acid Soln 100gm/l	No visual changes observed after immersion for 4 days, pencil line removed with soft wet cloth	ISO 10545-13 Min Class-GLC	Class GLA
c Potassium Hydroxide Soln 30gm/l	No visual changes observed after immersion for 4 days, pencil line removed with soft wet cloth	ISO 10545-13 Min Class-GLC	Class GLB

(Page 3 - 4)

[Handwritten Signature]
20/6/2020

NATIONAL CERA LAB

CERAMIC LABORATORY

Shop No. 16, 17, Ground Floor, Dariyalai Plaza,
Nr. Argli Ceramic, 8-A, N/H, Morbi - 363 642 (Guj.) INDIA.

Ph. : 02822 244049, Mo. : 98252 62649, 96622 97005, 98257 99418
E-mail : nationalceralab@rediffmail.com

As per all Countries Export report of Wall, Floor, Vitrified Tiles & Sanitary Wares

Ref. No.

Date :

TEST REPORT

Aug. 10. 2020

		Test Method	Require	Result
III Resistance to High Concentration of acid and Aakali				
a Hydrochloric Acid solution 18% (V/V)	No visual changes observed after immersion for 4 days, pencil line removed with soft wet cloth.	ISO 10545-13	Min Class GHC	Class GHA
b Lactic Acid Soln. 5% (v/v)	No visual changes observed after immersion for 4 days, pencil line removed with soft wet cloth.	ISO 10545-13	Min Class GHC	Class GHA
c Potassuim Hydroxide Soln. 100gm/l	visual changes observed after immersion for 4 days, pencil line removed with soft wet cloth.	ISO 10545-13	Min Class GHC	Class GHB
IV House hold chemical resistance				
Ammonium chloride solution 100gm/l	No visual changes observed after immersion for 24 hrs, pencil line removed with soft wet cloth.	ISO 10545-13	Min CLASS - GC	Class GA
V Swimming poll salt Sodium Hypochlorite solution 20mg/l	No visual changes observed after immersion for 24 hrs, pencil line removed with soft wet cloth.	ISO 10545-13	Min CLASS - GC	Class GA
VI Lead and Cadmlum release		ISO 10545-15	Limit	Result
a Lead release				
Test Solution				
Acietic Acid Solution 4% (v/v), (in 960ml distilled water)	Digestion time- 24 hrs (20±2°) Detected by ED XRF		0.1mg/dm²	0 00 mg/dm²
b Cadmium release				
Test Solution				
Acietic Acid Solution 4% (v/v), (in 960ml distilled water)	Digestion time- 24 hrs (20±2°) Detected by ED XRF		0.1mg/dm²	0.00 mg/dm²

CONCLUSION:

The sample drawn by party from the above lot complies with ISO STANDARD ISO 13006 :2018 Group BI a
Test Procedure as per ISO 10545

(page 4 of 4)

Verify by
Testing Engineer

Nimesh J. Kavar
(Nimesh J. Kavar)

Name of Authorised signatory :
Designation of signatory :

J.M. Kavar
Technical Manager

For
National Cera Lab

NATIONAL CERA LAB

PROPRIETOR

P-674

B+G+2 LUXURY VILLA AT FROND-H, PLOT PJJPFH09A PALM JUMEIRAH, DUBAI, UAE

PJJPFH09A

MATERIAL SUBMITTAL

Contractor: TGC Contracting LLC		Consultant: Model Engineering Consultants	
Address: P. O. Box: 62638 Dubai, UAE. Tel: 04 - 4540834		Address: P. O. Box: 26369 Dubai, UAE. Tel: 04 - 3266625	
Sub-Contractor: DREAM HOUSE			
Address:			
Date submittal prepared: 02-02-2024		Submittal Ref: MS-H09A-CVL-116 Rev. No.00	
Material description: MATERIAL SUBMITTAL FOR FLOOR & WALL TILE OPTION 1. TORO SAND			
Manufacturer:		Supplier:	
Address:		Address: UAE, Dubai	
Location:		Production period: Weeks	
Spec. Ref:		Delivery Ex-works: Weeks	
BOQ Ref:		Total Delivery time: Weeks	
Date Material required at site:		Expected date of delivery to site:	
Delivery method: <input checked="" type="checkbox"/> Overland <input type="checkbox"/> Sea Freight <input type="checkbox"/> Air Freight <input type="checkbox"/> Other			
Contractor's comments:			
If alternate Material submitted, attach full comparison to that specified.			
Attachments/Enclosures: <input checked="" type="checkbox"/> Catalogues <input type="checkbox"/> Drawings <input type="checkbox"/> Samples <input type="checkbox"/> Other			
Contractor's Authorized Signature: Engr. Kannan Pichaiya		Date: 02-02-2024	
Engineer's Comments: <i>No Object on Technicality</i>			
<input type="checkbox"/> Archt. <input type="checkbox"/> Str. Engr. <input type="checkbox"/> M. Engr. <input type="checkbox"/> E. Engr.			
Status: <input type="checkbox"/> Approved <input checked="" type="checkbox"/> Approved with comments <input type="checkbox"/> Not approved. Revise & submit <input type="checkbox"/> Rejected as comments			
Project Manager:		Date:	
Engineer:		Date:	

P-674


B+G+2 LUXURY VILLA AT FROND-H, PLOT PJJPFH09A PALM JUMEIRAH, DUBAI, UAE

PJJPFH09A

SAMPLE MATERIAL SUBMITTAL

Contractor: TGC Contracting LLC		Consultant: Model Engineering Consultants	
Address: P. O. Box: 62638 Dubai, UAE. Tel: 04 - 4540834		Address: P. O. Box: 26369 Dubai, UAE. Tel: 04 - 3266625	
Sub-Contractor: Address:			
Date submittal prepared: 18-01-2024		Submittal Ref: SM-H09A-CVL-043 Rev. No.00	
Material description: SAMPLE MATERIAL FOR FLOOR & WALL TILE OPTION 1. TORO SAND OPTION 2. TORO STORM OPTION 3. NIOS SMOKE			
Manufacturer:		Supplier:	
Address:		Address: UAE, Dubai	
Location:		Production period: Weeks	
Spec. Ref:		Delivery Ex-works: Weeks	
BOQ Ref:		Total Delivery time: Weeks	
Date Material required at site:		Expected date of delivery to site:	
Delivery method: <input checked="" type="checkbox"/> Overland <input type="checkbox"/> Sea Freight <input type="checkbox"/> Air Freight <input type="checkbox"/> Other			
Contractor's comments:			
If alternate Material submitted, attach full comparison to that specified.			
Attachments/Enclosures: <input checked="" type="checkbox"/> Catalogues <input type="checkbox"/> Drawings <input type="checkbox"/> Samples <input type="checkbox"/> Other			
Contractor's Authorized Signature: Engr. Kannan Pichaiya		Date: 18-01-2024	
Engineer's Comments:			
<p>No objection to the color & finish and to be used as alternative for 305 + 305A ensure the anti-slip Rating is suitable for wet areas</p>			
<div style="float: right;"> <input type="checkbox"/> Archt. <input type="checkbox"/> Str. Engr. <input type="checkbox"/> M. Engr. <input type="checkbox"/> E. Engr. </div>			
Status <input type="checkbox"/> Approved <input checked="" type="checkbox"/> Approved with comments <input type="checkbox"/> Not approved. Revise & submit <input type="checkbox"/> Rejected as comments			
Project Manager:		Engineer:	
Date:		Date: 19.01.2024	


No objection to the Color 8
finish as alternative for 305 + 305A
ensure the slip Rating is suitable
for wet area

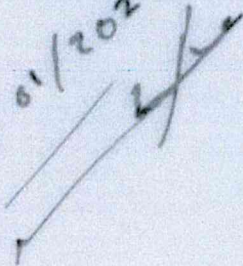19/01/2024


Toro sand

FULL BODY PORCELAIN TILE

TORO SAND

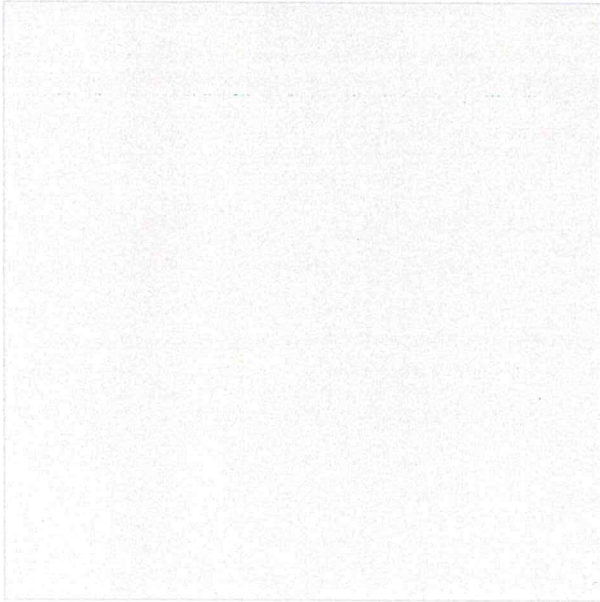

PRODUCT CODE : TORO SAND

SIZE : 600X600 MM

COLOR : BEIGE

TECHNOLOGY : FULL BODY PORCELAIN

SERIES : ASPERO SERIES

SURFACE LOOK : MATT

EDGE : RECTIFIED

THICKNESS : 9.0 MM


UNITY MEASURE : M2

ORIGIN : INDIA

TECHNICAL SPECIFICATION OF COLORBODY / FULLBODY VITRIFIED TILES (TORO SAND)

	CHARACTERISTIC	STANDARD AS PER ISO-13006/ EN14411 GROUP Bla	MEAN VALUE OF OASIS COLORBODY / FULLBODY VITRIFIED TILES		TEST METHOD
			16 mm	9.0 mm	
Regulatory Properties	Deviation In Length & Width	± 0.50%	± 0.20%	± 0.20%	ISO-10545-2
	Deviation In Thickness	± 5.00%	± 4.00%	± 4.00%	ISO-10545-2
	Straightness Of Sides	± 0.50%	± 0.10%	± 0.10%	ISO-10545-2
	Rectangularity	± 0.50%	± 0.20%	± 0.20%	ISO-10545-2
	Surface Flatness	± 0.50%	± 0.20%	± 0.20%	ISO-10545-2
	Color Differences	Unaltered	No Change	No Change	ISO-10545-16
Structural Properties	Water Absorption	< 0.50%	< 0.50%	< 0.05%	ISO-10545-3
	Apparent Density	> 2.00 g/cc	> 2.28 g/cc	> 2.28 g/cc	DIN 51082
Massive Mechanical Properties	Modulus of Rupture	Min. 35N/mm ²	Min. 45N/mm ²	Min. 45N/mm ²	ISO-10545-4
	Breaking Strength	Min. 1300 N	Min. 7500 N	Min. 2000 N	ISO-10545-4
	Impact Resistance	As Per Mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
Surface Mechanical Properties	Deep Abrasion Resistance	Max. 175mm ³	Max. 132mm ³	Max. 132mm ³	ISO-10545-6
	Moh's Hardness	Min. 6	7	7	EN 101
	Surface Abrasion Resistance	As Per Mfg.	N. A.	N. A.	ISO-10545-7
Thermo Hygrometric Properties	Frost Resistance	No Damage	Frost Proof	Frost Proof	ISO-10545-12
	Thermal Shock Resistance	No Damage	No Damage	No Damage	ISO-10545-9
	Moisture Expansion	Nil	Nil	Nil	ISO-10545-10
	Thermal Expansion(COE)	Max. 9.0 X 10 ⁻⁶	Max. 6.5 X 10 ⁻⁶	Max. 6.5 X 10 ⁻⁶	ISO-10545-8
	Crazing Resistance	As Per Mfg.	N. A.	N. A.	ISO-10545-11
Chemical Properties	Chemical Resistance	No Damage	No Damage	No Damage	ISO-10545-13
	Stain Resistance	Resistant	Resistant	Resistant	ISO-10545-14
Safety Properties	Slip Resistance	> 0.40	> 0.40	> 0.40	ISO-10545-17

PACKING DEATIL

Product	Size	Thikness	Pcs. / Box	Weight / Box	Area / Box
	60x120cm	9.0mm	2	31.00 kg.	1.44 sq. mtr.
	60x60cm	9.0mm	4	31.00 kg.	1.44 sq. mtr.
		16mm	2	27.00 kg.	0.72 sq. mtr.



REPORT ON DETERMINATION OF UNPOLISHED SLIP RESISTANCE VALUE (USRV)

Page 1 of 1

Client	: TGC Contracting LLC	Report No.	: CERR-2401/3381
Address	: Dubai UAE	Lab Project No.	: P-3345
Contractor	: Not Available	Date of Sample Received	: 30/01/2024
Consultant	: Not Available	Date of test	: 31/01/2024
Project Name	: Quality Control Testing	Reporting Date	: 01/02/2024
Sample By	: Dream house building materials Trading	Sample Size	: 600x600x10
Source/Supplier	: Dream house building materials Trading	Sample Identification	: NO
Sample Description	: VITRIFIED TILES	Colour	: NP
Test Location	: Mlab, Al Quoz	Tested By	: AS

Test Data :

Sliding Length (mm)	: 126 ± 1	Static force on the slider in its median position	: 22.2 N
Slider used	: Slider 55	Temperature of test surface (°C)	: 22.5

Lab specimen No.	Pendulum Test Value of each swing (PTV)	Mean Pendulum Test Value (PTV)
	Dry	Wet
CERQ-2401/1344	75	45
	80	45
	75	50
	75	45
	80	45
Average	77	46

Correlation Table.

" R " Rating Value For a person wearing shoes in everyday circumstances DIN 51130:2004 Classification	PTV (Pendulum Test Value) Or SRV (Slip Resistance Value)
R 9 (No Values below R 9)	11 - 18
R 10	18 - 34
R 11	34 - 51
R 12	51 - 70
R 13	70 +

Test Method : BS 7976-2:2002+A1:2013

Remarks : From above table, it may be assumed that Slip Resistance Performance of tested specimen in dry condition is equivalent to R13 and in wet condition is equivalent to R11 as per DIN 51130. Details of correlation table were extracted from research material.



Authorized Signatory
Qasam Khan

All rights reserved. Results relate only to the items tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.

Ref: FEC/DXB-144/Site/MC/23/014

Date: 16th February-2023

M/s Al Ashram Contracting L.L.C

P.O Box no: 1290 - Dubai, UAE

Tel.: +971-4-5884000

Fax: +971-4-5884004

Attention : **Mr. Sekar Pammi – Project Manager**

Project : **Belgravia- 4 - Residential Bldg. (G+3P+13F)**
Plots No. JVC12MHRS005 at Jumeirah Village Circle – Dubai

Subject : **Tile Material selection**
(M/s Dream House Building Material Trading LLC).

Dear Mr. Sekar,

With the reference to the above-mentioned project & subject, and based on the Client's selection to **M/s Dream House Building Material Trading LLC** for the required Tiles Material selection as per their quotation **No. DH-FEB-11427-23** dated on **14th February 2023 (copy attached)** with unit Price.


Therefore, you are hereby instructed to enter into a subcontractor agreement with **M/s Dream House Building Material Trading LLC** based on the above considering the following:

1. The Main Contractor is responsible to submit shop drawing, MOS, Mockup etc.... submissions for review and approval.
2. All required coordination with other activities, works, subcontractors, etc... is the Main Contractor full responsibility.
3. The final quantities are the Main Contractor full responsibility.
4. PC rate adjustment will be carried out in due course.
5. Payment terms is contractor full responsibility.
6. Contractor to verify the signed off sample by client / ID team prior placing the order.
7. This is for your information, record and necessary immediate action

Sincerely Yours,

For **Federal Engineering Consultants**

Ahmed Elabasy
Resident Engineer

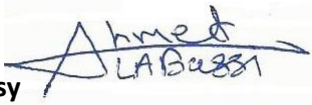

CC:

Mr. Kevin Yates – Construction Director (Ellington)
Mr. Vijay Kumar – Manager Constructions (Ellington)

Belgravia Heights II / Sloane I.

TL-03: 60x60 cm floor tile for apartment bathroom, powder room and laundry.

TL-04: 30x60 cm wall tile for apartment bathrooms.

TL-05: 90x60 cm skirting for apartment bathroom, powder room & laundry.

CTL-03: 60x60 cm floor and wall tile for PA change rooms & BOH toilet.

CTL-03A: 30x60 cm wall tile for ADA bath.

Thickness of tile to be 9mm, rectified.

No objection to color and finish. Order to be placed for the same batch.

Slip resistance: tile floor surface must meet coefficient of friction of 0.42 for flooring where required.

13/02/2023

APR

APR

Belgravia Heights II / Sloane I.

TL-03: 60 X 60 cm floor tile for apartment bathroom, powder room and laundry.

TL-04: 30 X 60 cm wall tile for apartment bathrooms.

TL-05: 90 X 60 cm Skirting for apartment bathroom, powder room & laundry.

CTL-03: 60 X 60 cm floor and wall tile for PA change rooms & both toilet.

CTL-03A: 30 X 60 cm wall tile for ADA bath.

Thickness of tile to be 9mm, rectified.

No objection to color and finish. Order to be placed for the same batch.


Slip resistance: tile floor surface must meet coefficient of friction of 0.42 for flooring where required.

13/02/2023

Asai.

Asai.

DHFG63078

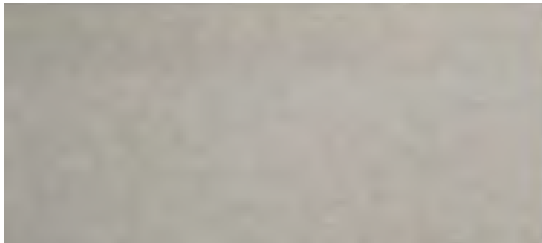

PRODUCT CODE	DHFG63078
SIZE	30X60CM
SERIES	PLAIN SERIES
COLOR	VERDE
TECHNOLOGY	PORCELAIN
STRUCTURE	SMOOTH
SURFACE LOOK	MATT
EDGE	RECTIFIED
THICKNESS	9 MM
UNITY MEASURE	M²
ORIGIN	CHINA

DHFG60078

VERDE



PRODUCT CODE	DHFG60078
SIZE	60X60CM
SERIES	PLAIN SERIES
COLOR	VERDE
TECHNOLOGY	PORCELAIN
STRUCTURE	SMOOTH
SURFACE LOOK	MATT
EDGE	RECTIFIED
THICKNESS	9 MM
UNITY MEASURE	M²
ORIGIN	CHINA

Ref: P690-MEC-AAC-0017
Date: 4th August 2023

To,
Al Ashram Contracting L.L.C
PO Box no. 40454
Dubai, UAE

Attention : Louis Linde - Chief Operations Officer/(Interim Project Manager)

Project : Proposed G+P+10+R Residential Building. on Plot No. 6316928 (DHE 13.0005), at Hadaeq Sheikh Mohammed Bin Rashed, Dubai, UAE

Subject : Nomination of Tiles – Prime Cost item

Dear Sir

With reference to the above project and subject, please find below nomination for the tile type mentioned below:

Supplier: Dream House Building Materials						
Contact Name: Mr. Azeez						
Number: 055 951 9123						
Email: dreamhouseuae@gmail.com						
Tile Ref	Design Code	Finish	Proposed Size	Qty	UOM	Unit Price
TL-07	7.5x30cm Ceramic Tile White Beveled	Wall finish	7.5x30cm	1.00	M2	38.00

The quotation for the same is duly attached for your reference, records and further action. You are hereby instructed to submit sample for the above-mentioned tile type to secure the approval. The PC rate adjustments to also be submitted for Engineer's review and approval.

Thanking you,


For **MODEL ENGINEERING CONSULTANTS**




Mohamed Zubair
Resident Engineer

Cc

Mr. Vijay Kumar - Ellington
Mr. Kevin Yates - Ellington
Mr. Osama Adam - Ellington
Mr. Atul Sharma - MEC
Mr. Louis Linde - Al Ashram
Mr. Sridher Babu - Al Ashram

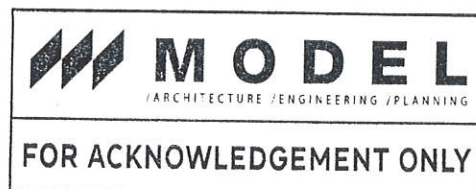

PORCELAIN MOSAIC TILE
QZ612GM20

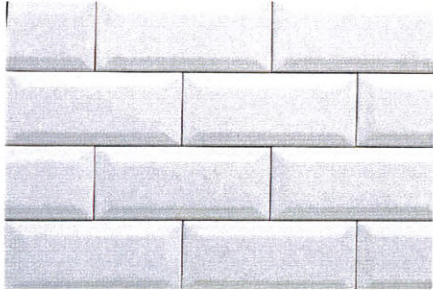

PRODUCT CODE	WHITE BEVELED EDGE
SIZE	75X300 MM
SERIES	SUBWAY TILE
COLOR	WHITE
TECHNOLOGY	CERAMIC
STRUCTURE	GLOSSY
SURFACE LOOK	GLOSSY
EDGE	BEVELED
THICKNESS	6 MM
UNITY MEASURE	M ²
ORIGIN	CHINA

Supplier: Dream House Building Materials Contact Name: Mr. Azeez Number: 055 951 9123 Email: dreamhouseuae@gmail.com							
TL-03	Porcelain Mosaic for Toilet shower	Wall finish	23.5x60cm	Mosaic	1	M2	107
TL-09(TL-08 in Listellato cut as per attached)							


The quotations for the same are duly attached for your reference, records and further action. You are hereby instructed to submit samples for all above mentioned tile types to secure the approval. The PC rate adjustments to also be submitted for Engineer's review and approval.

Thanking you,

For **MODEL ENGINEERING CONSULTANTS**

Mohamed Zubair

Mohamed Zubair
Resident Engineer

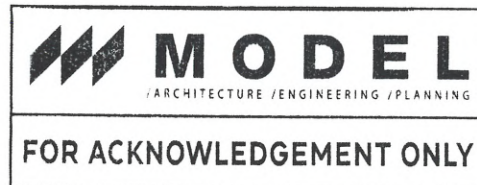

Cc

Mr. Vijay Kumar - Ellington
Mr. Kevin Yates - Ellington
Mr. Osama Adam - Ellington
Mr. Atul Sharma - MEC
Mr. Louis Linde - Al Ashram
Mr. Sridher Babu - Al Ashram













EH 2 – APARTMENT

PREVIOUS
SELECTION

NEW OPTION

TILE FINISHES

CODE	AREA	APPLICATION	IMAGE	IMAGE	DESCRIPTION
TL - TILES					
TL-01	Bathroom General Flooring	Flooring			Code: LUC60GM200 Size: 600x600 Matt
TL-02	Bathroom/ Powder Room	Wall			Code: LUC36GM400 Size: 300x600 Matt
TL-03	Bathroom/ Powder Room	Wall	 Listellato Cut		Code: LUC60GM400 Listellato Cut Matt Size: 23.5 x 60 cm
TL-04	General Floor Tile	Flooring			Code: LUC612GM200 Size: 1200X600 Matt
TL-05	Balcony Floor Tile	Flooring			Code: BRDV612GM284 Size: 200x1200 Matt

Ref: FEC/DXB-221/Site/LTR/TGC/23/002A
Date: 13TH September, 2023

M/s THE GATE CONSTRUCTION L.L.C (TGC)
P.O Box no: 25321
Tel.: +971-4-454 0831

Attention : Eng. Shivakumar Paramasivam– Deputy Project Manager

Project : DXB-221 - Hamilton House - Residential Bldg. (G+P+5F+R)
Plots No. JVC14PMRA007 at Jumeirah Village Circle – Dubai

Subject: Nomination of Tiles (Ceramic Wall Tiles of Bath & Toilet).
(M/S DREAM HOUSE BLDG.MAT.TR.LLC).

Dear Eng. Shivakumar,

With the reference to the above-mentioned project / subject and further to LOA ref.:
EP/HH/MC/2023/01 - clause (7.2) and client previous letter ref. HH/LTR/FEC/EM/002/2023 dated 10th
August 2023, and based on the Client's selection to M/S DREAM HOUSE BLDG.MAT.TR.LLC as per their
quotation Ref. H-SEP-11708-23 dated 11th September, 2023 for the required Ceramic Wall Tiles of
Bath & Toilet (copy attached) with unit Price.

Therefore, you are hereby instructed to enter into a subcontractor agreement with M/S DREAM
HOUSE BLDG.MAT.TR. LLC based on the above considering the following:

1. The Main Contractor is responsible to submit shop drawing, MOS, Mockup etc.... submissions for review and approval.
2. All required coordination with other activities, works, subcontractors, etc... is the Main Contractor full responsibility.
3. The contractor is responsible for the coordination with the supplier / subcontractor for delivery with full compliance with the project's approved baseline program.
4. The final quantities are the Main Contractor full responsibility.
5. PC rate adjustment will be carried out in due course.
6. Payment terms is contractor full responsibility
7. Contractor to verify the signed off sample by client / ID team prior placing the order.

This is for your information, record and necessary immediate action

Sincerely Yours,

For Federal Engineering Consultants

Haitham M. Elattar
Resident Engineer.



CC:

- Mr. Emeel Nasralla Mosa – Project Manager (Ellington)
- Mr. Faize Rehman – Sr. Manager (TGC)
- File

Reference: HH/LTR/FEC/EM/006/2023

Date: 13th September 2023

M/S. FEDERAL ENGINEERING CONSULTANTS
P.O. Box: 215960
Dubai, UAE

Attn : **Mr. Marwan Kassem – Head of Construction Dept.**

Project: **Hamilton House – Residential Bldg. (G+P+5P+R)**
Plots No. JVC14PMRA007 at Jumeirah Village Circle - Dubai

Subject: **Nomination of Tiles (Ceramic Wall Tiles of Bath & Toilet)**

Dear Mr. Marwan,

Reference to above mentioned subject and LOA ref.: EP/HH/MC/2023/01 - clause (7.2) and our previous letter ref. HH/LTR/FEC/EM/002/2023 dated 10th August 2023, please find attached nomination of Ceramic Wall Tiles of Bath and Toilet to M/s. Dream House Building Materials Trading LLC.

Please find supplementary documents of M/s. Dream House as attached.

- Dream House Proposals ref: DH-SEP-11708-23 dated 11th September 2023
- Approval of sample and signed by ID

Please issue to the Main Contractor to process the same as per Contract Conditions and finalize the Subcontract Agreement with the nominated subcontractor.

This is for your information and further action.

Best Regards
For Ellington Properties Development LLC


13/9/23

Emeel Nasralla Mosa
Project Manager

Enclosures: As stated
Cc: Mr. Kevin Yates - EPD

Ref: FEC/DXB-221/Site/LTR/TGC/23/002

Date: 11TH August, 2023

M/s THE GATE CONSTRUCTION L.L.C (TGC)

P.O Box no: 25321

Tel.: +971-4-454 0831

Attention : Eng. Shivakumar Paramasivam– Deputy Project Manager

Project : DXB-221 - Hamilton House - Residential Bldg. (G+P+5F+R)
Plots No. JVC14PMRA007 at Jumeirah Village Circle – Dubai

Subject: Nomination of Tiles.
(M/S DREAM HOUSE BLDG.MAT.TR.LLC).
(M/S AL SABOUH BUILDING MAT TRADING L.L.C).

Dear Eng. Shivakumar,

With the reference to the above-mentioned project & subject, and based on the Client's selection to M/S DREAM HOUSE BLDG.MAT.TR.LLC as per their quotation Ref. DH-AUG-11635-23 & M/S AL SABOUH BUILDING MAT TRADING L.L.C as per their quotation Ref. 4004177 for the required Tiles (copy attached) with unit Price.

Therefore, you are hereby instructed to enter into a subcontractor agreement with M/S DREAM HOUSE BLDG.MAT.TR. LLC & M/S AL SABOUH BUILDING MAT TRADING L.L.C based on the above considering the following:

1. The Main Contractor is responsible to submit shop drawing, MOS, Mockup etc.... submissions for review and approval.
2. All required coordination with other activities, works, subcontractors, etc... is the Main Contractor full responsibility.
3. The contractor is responsible for the coordination with the supplier / subcontractor for delivery with full compliance with the project's approved baseline program.
4. The final quantities are the Main Contractor full responsibility.
5. PC rate adjustment will be carried out in due course.
6. Payment terms is contractor full responsibility
7. Contractor to verify the signed off sample by client / ID team prior placing the order.

This is for your information, record and necessary immediate action

Sincerely Yours,

For Federal Engineering Consultants

Haitham M. Elattar
Resident Engineer.



CC:

- Mr. Emeel Nasralla Mosa – Project Manager (Ellington)
- Mr. Faize Rehman – Sr. Manager (TGC)
- File



Reference: HH/LTR/FEC/EM/002/2023

Date: 10th August 2023

M/S. FEDERAL ENGINEERING CONSULTANTS
P.O. Box: 215960
Dubai, UAE

Attn : **Mr. Marwan Kassem – Head of Construction Dept.**

Project: **Hamilton House – Residential Bldg. (G+P+5P+R)**
Plots No. JVC14PMRA007 at Jumeirah Village Circle - Dubai

Subject: **Nomination of Tiles – Hamilton House**

Dear Mr. Marwan,

Reference to above mentioned subject and LOA ref.: EP/HH/MC/2023/01 - clause (7.2), please be informed that M/s. Dream House Building Materials Trading LLC and M/s. Al Sabouh Building Mat. Trading LLC are hereby nominated for the supply of Tiles under the terms of the above letter of acceptance and related contract conditions.

Please find supplementary documents of M/s. Dream House & M/s. Al Sabouh as attached.

- Al Sabouh Proposal ref: 4004177 dated 3rd August 2023
- Dream House Proposals ref: DH-AUG-11644-23 dated 8th August 2023 & DH-AUG-11635-23 dated 3rd August 2023
- Technical Data Sheet Summary – Al Sabouh (Approved by ID)
- Technical Data Sheet Summary – Dream House (Approved by ID)
- Tiles Samples

Accordingly, you are advised to issue the same to the Main Contractor to process the same as per Contract Conditions and finalize the Subcontract Agreement with the nominated subcontractor.

This is for your information and further action.

Best Regards
For Ellington Properties Development LLC


10/8/23
Emeel Nasralla Mosa
Project Manager

Enclosures: As stated

Cc: Mr. Kevin Yates - EPD

APPROVED
JULY 21, 2013

CODE: DHG063-N
ITEM: SKIRTING TILE
SIZE: 70/80/100X 600 MM

AREA REF: A-SK-02, CR-SK-01
JR-SK-01 & S2.01

* LOCATION: POWDER ROOM, BATHROOM, LAUNDRY, & BOH AREAS
EXCEPT GARBAGE ROOM.

APPROVED
JULY 21, 2013

CODE: DHG063-N
ITEM: FULL BODY TILE
SIZE: 600X600 MM

AREA REF: ~~A-SK-02, CR-SK-01~~
A-FL-02, CR-T1-02,
FM-FL-02, JA-FL-01 & AFL-02 &
A-WL-01

* LOCATION: POWDER ROOM, BATHROOM, LAUNDRY, & BOH AREAS
EXCEPT GARBAGE ROOM.

* ENSURE ALL THE BATCHES ARE THE SAME QUALITY AS PER APPROVED SAMPLES.
* NO DEFECTS OR DAMAGE

lutions

CODE	DH6063-N
ITEM	SKIRTING TILE
SIZE	70/80/100X600 MM
LOCATION	FLOOR
AREA REF	A-SK-02, CR-SK-01, JR-SK-01 & S2.01

CODE	: DH6063-N
ITEM	: FULL BODY TILE
SIZE	: 600X600 MM
LOCATION	: FLOOR & WALL
AREA REF	: A-FL-02, CR-TI-02, FM-FL-02, JA-FL-01, F2.01 & A-WL-01

LOCATION: APARTMENT UNIT BATHROOM & POWDER ROOM
BACKSPLASH (FEATURE WALL)
PUBLIC AREAS CHANGING ROOM (FEMALE & MALE)


SIZE: 30X30 CM MESH (DOUBLE CHECK W/ SUPPLIER)

COLOR: WHITE MOSAIC

NOTES: ENSURE THE BATCHES ORDERED ON SITE
SHOULD BE GOOD QUALITY, FLAWLESS
SIMILAR ON THE CONTROL SAMPLE. NO
DEFECTS OR DAMAGE

APPROVED
JULY 31, 2012

Approved Mosaic Tile



Dream House

BUILDING MATERIALS TRADING L.L.C

email : dreamhouseuae@gmail.com




Tel: 06 7674734 | Mob: 055 9519123

Approved
JUL 31, 2023






Approved
JUL 31, 2023

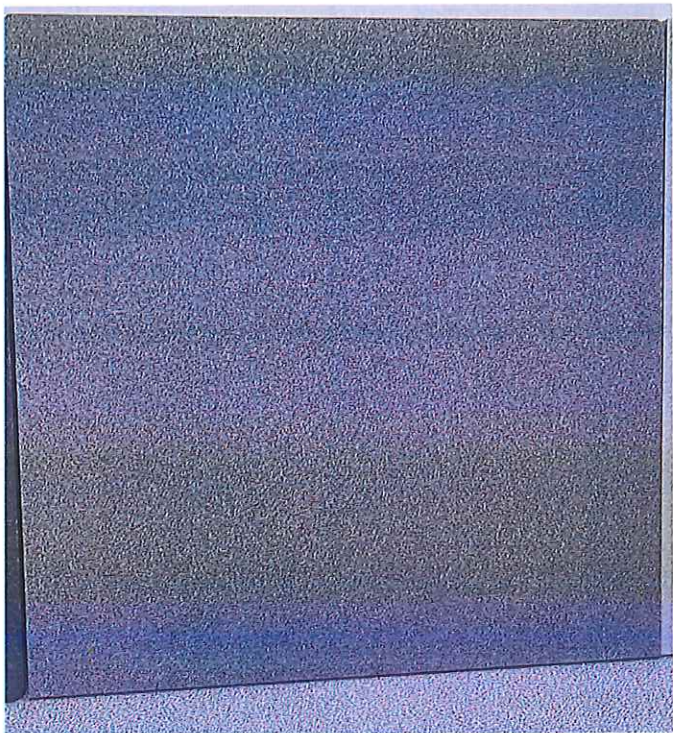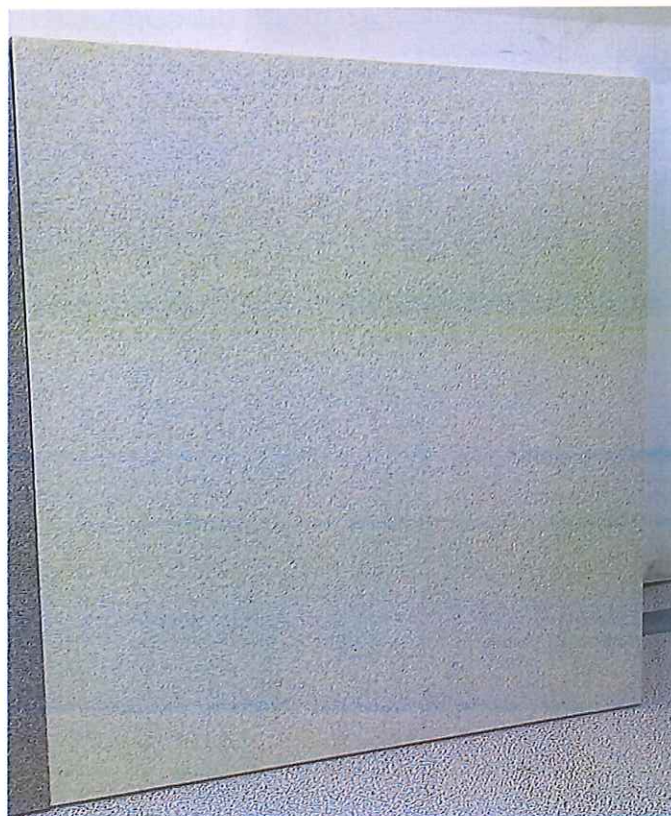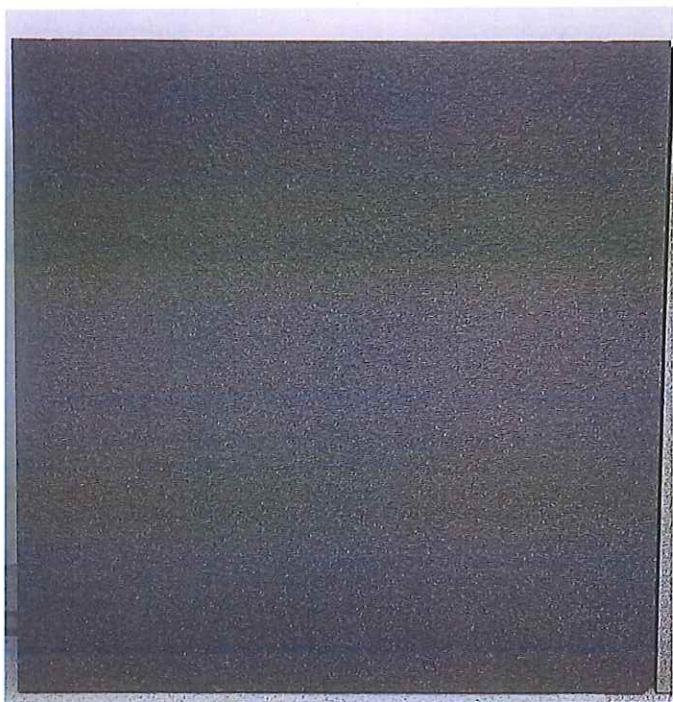



BH-02-ALC60-Civil-MA-153-

AWAJ			
PROJECT TITLE: G+2P 12 FLOORS (TWIN TOWER) ON PLOT NO: 3474831, AL MERKADH, DUBAI, UAE		MATERIAL SUBMITTAL	
			
Ref. No:	SH02-ALC60-CIVIL-MA-148	Rev:	0
Date:	8-Dec-22		
Submittal Title	Material submittal for external grade porcelain tiles for hardscape areas		
Item No.	Material Description	Location	
1	Material submittal for external grade porcelain tiles for hardscape areas	Ground and first floor	
Manufacturer / Supplier		M/s. Dream House	
Country of Origin		UAE	
Applicable Standards		NA	
Project specs. Ref.		-	
BOQ Ref.		-	
Location of use		Ground and first floor	
Technical Details submitted as		<input checked="" type="checkbox"/> Attachment <input type="checkbox"/> Catalogue	
Sample Provided		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
Availability of Material		<input type="checkbox"/> Local <input checked="" type="checkbox"/> Import	
Lead Time Required		<input type="checkbox"/> Yes <input type="checkbox"/> No	
Time of Delivery to Site		30 Days ✓	
Supplier Details		Company Name & Address : M/s. Dream House Telephone No.: Fax No.: Email	
Compliance with Project Specifications		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Alternative (please fill below)	
ALTERNATIVE MATERIAL			
Time Implication of Alternatives		<input checked="" type="checkbox"/> No <input type="checkbox"/> Yes	
Cost Implication of Alternatives		<input checked="" type="checkbox"/> No <input type="checkbox"/> Yes	
Reasons for Alternative (include supporting documents, if any) Suitability concerns			
The above mentioned material is submitted for your review / approval			
Contractor's Representative		Consultant's Representative	
Mr. Muralidhara Project Manager		Mr. Suresh kumar Sr. Resident Engineer	
CONSULTANT'S COMMENTS:			
<p style="font-size: 1.2em; color: blue;">Not acceptable.</p>			
Engineer's Representative		The aforementioned material has been -	
Name: _____		<input type="checkbox"/> A - Approved as submitted <input checked="" type="checkbox"/> B - Approved as noted Incorporate & proceed <input type="checkbox"/> C - Revise & Re-submit before work proceeds <input type="checkbox"/> D - Rejected	
Signature _____		<div style="text-align: right; color: red;"> Akshay 09/12/22 </div>	
Date: _____			
Received by Contractor	Contractor's Representative	Signature	Date
<div style="text-align: center;">  </div>			
Distribution: <input type="checkbox"/> Employer <input type="checkbox"/> Consultant <input type="checkbox"/> Contractor <input type="checkbox"/> Others			



OASIS TILES IN HOUSE LABORATORY

Date: 04th, March - 2022

SAMPLE DESCRIPTION AS PER CUSTOMER" S LETTER

"Oasis" brand Full Body Antiskid vitrified tiles, 600mm x 600mm
Thinness of the Tiles :- 16mm+
Design Name : Core Nero

TEST DESIRED:

Sr. No.	Test	Test Method
1	Water absorption (% by mass)	IS 15622 : 2006
2	Modulus of Rupture (MOR), (N/mm ²)	
3	Breaking strength (N)	
4	Thermal Shock Resistance	
5	Dimension (LXW)	
6	Straightness of Sides	
7	Rectangularity	
8	Surface Flatness	
9	Chemicals Resistance	
10.	Surface Abrasion	
11.	Skid Resistance	Std. Lab. Method
12.	Glossiness	
13.	Whiteness Index	

RESULTS

S. No.	Test Conducted	Test Results	Remarks
1.	Water absorption (% by mass)	i) 0.05 ii) 0.07 iii) 0.05 iv) 0.07 v) 0.05 Average 0.06	Based on the results of the water absorption, the tested tiles conformed to Gr.B Ia (WA≤0.08%) of IS 15622 : 2006, The further test results were derived as per requirement of Group B Ia

OASIS VITRIFIED PVT. LTD.

Regd. Office : 8-A, National Highway,
Kandla Road, Morbi - 363642 (Guj.) INDIA.
email: oasisvitrified@gmail.com

Customer Care: +91 70462 88888
Web: www.oasistiles.in

TIN No. : 24092005392
CST No. : 24592005392
GST NO. : 24AAACO9804HIZI
PAN No. : AAACO9804H
CIN No. : U26914GJ2007PTC052200



S. No.	Test Conducted	Test Results	Test Requirements as per ISO 15622: 2006	Remarks	
2.	Modulus of Rupture (MOR), (N/mm ²) Spam length = 580 mm Average thickness of the tiles measured = 16 Mm	i) 45.03 ii) 45.33 iii) 50.76 iv) 46.75 v) 49.22 vi) 45.94 vii) 46.63 Average 47.09	(Gr. B Ia) Average 35 N/mm ² Individual 32 N/mm ² minimum	Passed The test	

S. No.	Test Conducted	Test Results	Test Requirements as per ISO 15622 : 2006	Remarks
3.	Breaking Strength (N) Spam length = 580 mm Average thickness of the tiles measured = 16 mm	i) 7570.93 ii) 7544.83 iii) 8490.72 iv) 7849.82 v) 8185.25 vi) 7580.15 vii) 7752.18 Average 7853.41	(Gr. B Ia) For thickness $\geq 7.5\text{mm}$ 1300N, minimum	Passed The test
4.	Thermal Shock resistance	None of the tile as tested showed any sign of defects on the surface at the end of the 10 th cycle.	(Gr. B Ia) Tile specimens Should not show any visible defect when subjected to thermal shock resistance test as per test method IS: 13630 : 2006 (Part 5) with immersion.	Passed The test
5.	Dimension (L x W) a) The deviation, in percent, of the average size for each tile (4 side) from the work size. b) The deviation, in percent of the average size of each tile (4 sides) from the average size of the 10 test specimens (40 sides)	+ 0.08 % (max.) + 0.02 % (max.) - 0.01 % (max.)	(Gr. B Ia) $\pm 0.1\%$ $\pm 0.1\%$	Passed the test Passed the test

OASIS VITRIFIED PVT. LTD.

Regd. Office : 8-A, National Highway,
Kandla Road, Morbi - 363642 (Guj.) INDIA.
email: oasisvitrified@gmail.com

Customer Care: +91 70462 88888
Web: www.oasistiles.in

TIN No. : 24092005392
CST No. : 24592005392
GST NO. : 24AAACO9804H1ZI
PAN No. : AAACO9804H
CIN No. : U26914GJ2007PTC052200





TILES & SANITARYWARE

6.	Straightness of Sides: (Facial sides) The maximum deviation from straightness in percent related to the corresponding work sizes	+ 0.02 % (max.) - 0.06 % (max.)	(Gr. B Ia) ± 0.1%	Passed the test
7.	Rectangularity The maximum deviation from rectangularity in percent related to the corresponding work sizes.	+0.05(max.) -0.08(max.)	(Gr. B Ia) ± 0.1%	Passed the test
8.	Surface Flatness The maximum in percent (a) Centre of curvature related to diagonal calculated from work size. (b) Edge of curvature related to the corresponding work size. (c) Warpage related to the diagonal calculated from the work size	+ 0.20 % (max.) + 0.15 % (max.) + 0.15 % (max.) - 0.05 % (max.)	(Gr. B Ia) ± 0.2% ± 0.2% ± 0.2%	Passed the test Passed the test Passed the test

OASIS VITRIFIED PVT. LTD.

Regd. Office : 8-A, National Highway,
Kandla Road, Morbi - 363642 (Guj.) INDIA.
email: oasisvitrified@gmail.com

Customer Care: +91 70462 88888
Web: www.oasistiles.in

TIN No. : 24092005392
CST No. : 24592005392
GST NO. : 24AAACO9804HIZI
PAN No. : AAACO9804H
CIN No. : U26914GJ2007PTC052200





TILES & SANITARYWARE

S. No.	Test Conducted	Test Results	Test Requirements as per ISO 15622 : 2006	Remarks
9.	Chemical Resistance Five test specimens were treated with following solns.			
	1. Household chemicals a) Ammonium Chloride soln. (100gm/l)	No visual changes observed after immersion for 6hrs., pencil lines removed with soft dry cloth.	"Class-AA" min.	Conformed to "Class-AA"
	b) Standard Cleaning Agent Soln., (As per procedure)	No visual changes observed after immersion for 6hrs., pencil lines removed with soft dry cloth.	"Class-AA" min.	Conformed to "Class-AA"
	2. Swimming Pool Salts a) Sodium hypochlorite soln. (20 mg/l)	No visual changes observed after immersion for 6hrs., pencil lines removed with soft dry cloth.	"Class-AA" min.	Conformed to "Class-AA"
	b) Copper Sulphate Soln., (20mg/l)	No visual changes observed after immersion for 6hrs., pencil lines removed with soft dry cloth.	"Class-AA" min.	Conformed to "Class-AA"
	3. Acids a) Hydrochloric acid soln., 3 % (v/v)	No visual changes observed after immersion for 6hrs., pencil lines removed with soft dry cloth.		Conformed to "Class-AA"
	b) Citric acid soln., (100 gm/1)	No visual changes observed after immersion for 6hrs., pencil lines removed with soft dry cloth.		Conformed to "Class-AA"
	4. Alkali Potassium hydroxide soln.,(200gm/l)	No visual changes observed after immersion for 6hrs., pencil lines removed with soft dry cloth.	-----	Conformed to "Class-AA"

OASIS VITRIFIED PVT. LTD.

Regd. Office : 8-A, National Highway,
Kandla Road, Morbi - 363642 (Guj.) INDIA.
email: oasisvitrified@gmail.com

Customer Care: +91 70462 88888
Web: www.oasistiles.in

TIN No. : 24092005392
CST No. : 24592005392
GST NO. : 24AAAC09804H1Z1
PAN No. : AAAC09804H
CIN No. : U26914GJ2007PTC052200





TILES & SANITARYWARE

S. No.	Test Conducted	Test Results	Test Method
10.	Surface Slip Resistance / Skid Resistance		
	(a) Condition of Test Surface: Tile surface was cleaned thoroughly by wet cloth followed by dry cloth and ensured that the surface is completely clean and dry at the time of testing.		As per IS 13630 (Part 11) : 2006
	(b) Direction of Test Coefficient of Friction μ		
	1. Parallel to sides (4 measurements)	1) 0.48 2) 0.51 3) 0.48 4) 0.37	
	2. Diagonal to sides (4 measurements)	5) 0.40 6) 0.39 7) 0.41 8) 0.43	

❖ Details of computerized data sheet enclosed.



OASIS VITRIFIED PVT. LTD.

Regd. Office : 8-A, National Highway,
Kandla Road, Morbi - 363642 (Guj.) INDIA.
email: oasisvitrified@gmail.com

Customer Care: +91 70462 88888
Web: www.oasistiles.in

TIN No. : 24092005392
CST No. : 24592005392
GST NO. : 24AAACO9804H1ZI
PAN No. : AAACO9804H
CIN No. : U26914GJ2007PTC052200



THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THIS SUBMITTAL FOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FAC ARCHITECTURE + DESIGN	9/10/19 Signature AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C.

Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai
UAE

SAMPLE TAG SUBMITTAL

Ref. No.

ST/C/05

Rev. No.

0

Material Detail

List of Enclosure

Item Description	SAMPLE BOARD FOR PORCELAIN / CERAMIC TILES FOR FLOOR , WALL , SKIRTING & THRESHOLD WITH PRICE TAG OF EACH ITEM LABELLED	(Tick the Related Box)
Specs. / BOQ / Drwg. Reference	MOOD BOARD 1.0 - STUDENT ROOM - SRT1, SRT2, SRT3, SRT4 & SRT5 - RENDER + FINISHES	<input type="checkbox"/> Vendor's Technical Literature
Material Specified	-	<input type="checkbox"/> Compliance Statement
Material Proposed	PORCELAIN / CERAMIC TILES FOR FLOOR , WALL , SKIRTING & THRESHOLD	<input type="checkbox"/> Previous Test Results
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	<input type="checkbox"/> Copy of the Related Specs.
Reason for Alternative		<input checked="" type="checkbox"/> Sample
Remarks		<input type="checkbox"/> List of Previous Projects Done
		<input type="checkbox"/> Others (Specify):
		<input type="checkbox"/> INDUSTRIAL LICENCE

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature:

Abraham Jacob

Date:

9-Oct-19

FACE Architecture + Design: Received:

Date:

FACE Architecture + Design: Resident Engineer's Comments:

* FINAL SELECTION WILL BE DONE BY CONSULTANT & CLIENT.	<input type="checkbox"/> A - Approved
* MOOD BOARDS ARE APPROVED.	<input checked="" type="checkbox"/> B - Approved as Noted
* VENDOR WILL BE FINALIZED POST APPROVAL FROM CLIENT & CONSULTANT.	<input type="checkbox"/> C - Incorporate comments Revise & Resubmit
* ALL CERTIFICATIONS & TEST REPORTS TO BE PRESENTED BY FINAL VENDOR	<input type="checkbox"/> D - Not Approved

FACE Architecture + Design: RE Signature:

X.H.P.J.C.P.

Date:

10-10-2019

Main Contractor Received:

[Signature]

Date:

22/10/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

SHG: No Objection

FIM: REJECTED. PHYSICAL SAMPLES TO BE ISSUED AS PER MEETING 16.10.2019, PHOTOS WILL NOT BE

* Handed over for release 22/10/19

THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THE CONTRACTOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C. Signature: <i>[Signature]</i>
Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE			

SAMPLE TAG SUBMITTAL	Ref. No.	ST/C/06
	Rev. No.	0

Material Detail

List of Enclosure

(Tick the Related Box)

Item Description	SAMPLE BOARD FOR PORCELAIN / CERAMIC TILES FOR FLOOR, WALL WITH PRICE TAG OF EACH ITEM LABELLED	<input type="checkbox"/> Vendor's Technical Literature
Specs. / BOQ / Drwg. Reference	MOOD BOARD 2.0 - STUDENT BATH ROOM - SRT1, SRT2, SRT3, SRT4 & SRT5 - RENDER + FINISHES	<input type="checkbox"/> Compliance Statement
Material Specified	-	<input type="checkbox"/> Previous Test Results
Material Proposed	PORCELAIN / CERAMIC TILES FOR FLOOR, WALL	<input type="checkbox"/> Copy of the Related Specs.
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	<input checked="" type="checkbox"/> Sample
Reason for Alternative		<input type="checkbox"/> List of Previous Projects Done
Remarks		<input type="checkbox"/> Others (Specify):
		<input type="checkbox"/> INDUSTRIAL LICENCE

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature: <i>[Signature]</i> Abraham Jacob	Date:	9-Oct-19
FACE Architecture + Design: Received:	Date:	

FACE Architecture + Design: Resident Engineer's Comments:

REFER MOOD BOARD (1) - COMMENTS	<input type="checkbox"/> A - Approved
	<input checked="" type="checkbox"/> B - Approved as Noted
	<input type="checkbox"/> C - Incorporate comments Revise & Resubmit
	<input type="checkbox"/> D - Not Approved

FACE Architecture + Design: RE Signature: <i>[Signature]</i>	Date:	10-10-19
Main Contractor Received: <i>[Signature]</i>	Date:	22/10/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THE CONTRACTOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	<div style="text-align: right;">9/10/19</div> <div style="text-align: right;">5.5/19</div> <div style="text-align: center;">  AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C. </div>
Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE			

SAMPLE TAG SUBMITTAL

Ref. No.

ST/C/07

Rev. No.

0

Material Detail

List of Enclosure


(Tick the Related Box)

Item Description	SAMPLE BOARD FOR PORCELAIN / CERAMIC TILES FLOORING , SKIRTING WITH PRICE TAG OF EACH ITEM LABELLED
Specs. / BOQ / Drwg. Reference	MOOD BOARD 4.0 - MAIN ENTRANCE AND RECEPTIONS - RENDER + FINISHES
Material Specified	-
Material Proposed	PORCELAIN / CERAMIC TILES FLOORING , SKIRTING
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC
Reason for Alternative	
Remarks	

- ☐ Vendor's Technical Literature
☐ Compliance Statement
☐ Previous Test Results
☐ Copy of the Related Specs.
☒ Sample
☐ List of Previous Projects Done
☐ Others (Specify):
☐ INDUSTRIAL LICENCE

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature:



Date:

9-Oct-19

FACE Architecture + Design: Received:

Date:

FACE Architecture + Design: Resident Engineer's Comments:

REFER MOOD BOARD (1) COMMENTS	<input type="checkbox"/> A - Approved <input checked="" type="checkbox"/> B - Approved as Noted <input type="checkbox"/> C - Incorporate comments Revise & Resubmit <input type="checkbox"/> D - Not Approved
-------------------------------	---

FACE Architecture + Design: RE Signature:



Date:

10-10-2019

Main Contractor Received:



Date:

22/10/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THE CONTRACTOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	<div style="text-align: right;"> RECEIVED Date: 9/10/19 5:52 pm AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C. </div>
Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE			


SAMPLE TAG SUBMITTAL	Ref. No.	ST/C/08
	Rev. No.	0

Material Detail

List of Enclosure

Item Description	SAMPLE BOARD FOR PORCELAIN / CERAMIC TILES FOR FLOORING, BACK SPLASH, SKIRTING & THRESHOLD WITH PRICE TAG OF EACH ITEM LABELLED	(Tick the Related Box)
Specs. / BOQ / Drwg. Reference	MOOD BOARD 5.0 - ACTIVITY ROOM - RENDER + FINISHES	<input type="checkbox"/> Vendor's Technical Literature
Material Specified	-	<input type="checkbox"/> Compliance Statement
Material Proposed	PORCELAIN / CERAMIC TILES FOR FLOORING, BACK SPLASH, SKIRTING & THRESHOLD	<input type="checkbox"/> Previous Test Results
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	<input type="checkbox"/> Copy of the Related Specs.
Reason for Alternative		<input checked="" type="checkbox"/> Sample
Remarks		<input type="checkbox"/> List of Previous Projects Done
		<input type="checkbox"/> Others (Specify):
		<input type="checkbox"/> INDUSTRIAL LICENCE

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature:		Date:	9-Oct-19
FACE Architecture + Design: Received:		Date:	

FACE Architecture + Design: Resident Engineer's Comments:

*REFER MOODBOARD (1) COMMENTS	<input type="checkbox"/> A - Approved
	<input checked="" type="checkbox"/> B - Approved as Noted
	<input type="checkbox"/> C - Incorporate comments Revise & Resubmit
	<input type="checkbox"/> D - Not Approved

FACE Architecture + Design: RE Signature:		Date:	10-10-19
Main Contractor Received:		Date:	22/10/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.


THE EMPLOYER: FIM STUDENT ACCOMMODATION SPV 1	DEVELOPMENT TEAM: SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	THE ENGINEER: FACE ARCHITECTURE + DESIGN	THE CONTRACTOR: Date: 9/10/19 5:58 PM AROMA الشركة الدولية للمقاولات (International Building Contracting L.L.C.)
Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE			

SAMPLE TAG SUBMITTAL	Ref. No.	ST/C/09
	Rev. No.	0

Material Detail



Item Description	SAMPLE BOARD FOR PORCELAIN / CERAMIC TILES FOR BACK SPLASH, FLOOR, SKIRTING & THRESHOLD WITH PRICE TAG FOR EACH ITEM LABELLED	List of Enclosure (Tick the Related Box) <input type="checkbox"/> Vendor's Technical Literature <input type="checkbox"/> Compliance Statement <input type="checkbox"/> Previous Test Results <input type="checkbox"/> Copy of the Related Specs. <input checked="" type="checkbox"/> Sample <input type="checkbox"/> List of Previous Projects Done <input type="checkbox"/> Others (Specify): <input type="checkbox"/> INDUSTRIAL LICENCE
Specs. / BOQ / Drwg. Reference	MOOD BOARD 6.0 - BREAKOUT SPACE - RENDER + FINISHES	
Material Specified	-	
Material Proposed	PORCELAIN / CERAMIC TILES FOR BACK SPLASH, FLOOR, SKIRTING & THRESHOLD	
Manufacturer / Local Supplier	M/S. DREAM HOUSE BUILDING MATERIAL TRADING LLC	
Reason for Alternative		
Remarks		

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature: 	Date: 9-Oct-19
FACE Architecture + Design: Received:	Date:

FACE Architecture + Design: Resident Engineer's Comments:

* REFER MOOD BOARD ① COMMENTS	<input type="checkbox"/> A - Approved <input checked="" type="checkbox"/> B - Approved as Noted <input type="checkbox"/> C - Incorporate comments Revise & Resubmit <input type="checkbox"/> D - Not Approved

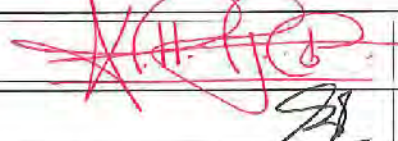FACE Architecture + Design: RE Signature: 	Date: 10-10-2019
Main Contractor Received: 	Date: 22/10/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THE CONTRACTOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	9/10/19 5:58pm AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C.
Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE			


SAMPLE TAG SUBMITTAL	Ref. No.	ST/C/010
	Rev. No.	0

Material Detail

List of Enclosure



Item Description	SAMPLE BOARD FOR PORCELAIN / CERAMIC TILES FOR FLOOR, WALL, SKIRTING, THRESHOLD, CANTEEN BUFFET & CANTEEN BUFFET SKIRTING WITH PRICE TAG OF EACH ITEM LABELLED	(Tick the Related Box) <input type="checkbox"/> Vendor's Technical Literature <input type="checkbox"/> Compliance Statement <input type="checkbox"/> Previous Test Results <input type="checkbox"/> Copy of the Related Specs. <input checked="" type="checkbox"/> Sample <input type="checkbox"/> List of Previous Projects Done <input type="checkbox"/> Others (Specify): <input type="checkbox"/> INDUSTRIAL LICENCE
Specs. / BOQ / Drwg. Reference	MOOD BOARD 8.0 - CANTEEN - RENDER + FINISHES	
Material Specified	-	
Material Proposed	PORCELAIN / CERAMIC TILES FOR FLOOR, WALL, SKIRTING, THRESHOLD, CANTEEN BUFFET & CANTEEN BUFFET SKIRTING	
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	
Reason for Alternative		
Remarks		

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature:		Date:	9-Oct-19
FACE Architecture + Design: Received:		Date:	

FACE Architecture + Design: Resident Engineer's Comments:

* REFER MOODBOARD ① COMMENTS	<input type="checkbox"/> A - Approved <input checked="" type="checkbox"/> B - Approved as Noted <input type="checkbox"/> C - Incorporate comments Revise & Resubmit <input type="checkbox"/> D - Not Approved

FACE Architecture + Design: RE Signature:		Date:	10-10-2019
Main Contractor Received:		Date:	22/10/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.


THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THE CONTRACTOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C.
Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE			

SAMPLE TAG SUBMITTAL	Ref. No.	ST/C/011
	Rev. No.	0

Material Detail



Item Description	SAMPLE BOARD FOR PORCELAIN / CERAMIC TILES FOR THRESHOLD WITH PRICE TAG OF EACH ITEM LABELLED	List of Enclosure (Tick the Related Box) <input type="checkbox"/> Vendor's Technical Literature <input type="checkbox"/> Compliance Statement <input type="checkbox"/> Previous Test Results <input type="checkbox"/> Copy of the Related Specs. <input checked="" type="checkbox"/> Sample <input type="checkbox"/> List of Previous Projects Done <input type="checkbox"/> Others (Specify): <input type="checkbox"/> INDUSTRIAL LICENCE
Specs. / BOQ / Drwg. Reference	MOOD BOARD 9.0 - LIBRARY - RENDER + FINISHES	
Material Specified	-	
Material Proposed	PORCELAIN / CERAMIC TILES FOR THRESHOLD	
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	
Reason for Alternative		
Remarks		

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature:		Date:	9-Oct-19
FACE Architecture + Design: Received:		Date:	

FACE Architecture + Design: Resident Engineer's Comments:

* REFER MOOD BOARD (1) - COMMENTS	<input type="checkbox"/> A - Approved <input checked="" type="checkbox"/> B - Approved as Noted <input type="checkbox"/> C - Incorporate comments Revise & Resubmit <input type="checkbox"/> D - Not Approved
-----------------------------------	--

FACE Architecture + Design: RE Signature:		Date:	10-10-2019
Main Contractor Received:		Date:	22/10/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THE CONTRACTOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	Date: 9/10/19 6.00pm AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C.

Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE

SAMPLE TAG SUBMITTAL

Ref. No. ST/C/012


Rev. No. 0

Material Detail

List of Enclosure

Item Description	SAMPLE BOARD FOR PORCELAIN / CERAMIC TILES FOR FLOOR, SKIRTING & THRESHOLD WITH PRICE TAG OF EACH ITEM LABELLED	(Tick the Related Box)
Specs. / BOQ / Drwg. Reference	MOOD BOARD 11.0 - PRAYER ROOM + LIFT LOBBY + CORRIDOR - RENDER + FINISHES	<input type="checkbox"/> Vendor's Technical Literature <input type="checkbox"/> Compliance Statement <input type="checkbox"/> Previous Test Results <input type="checkbox"/> Copy of the Related Specs. <input checked="" type="checkbox"/> Sample <input type="checkbox"/> List of Previous Projects Done <input type="checkbox"/> Others (Specify): <input type="checkbox"/> INDUSTRIAL LICENCE
Material Specified	-	
Material Proposed	PORCELAIN / CERAMIC TILES FOR FLOOR, SKIRTING & THRESHOLD	
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	
Reason for Alternative		
Remarks		

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated hereabove.

Main Contractor Signature:		Date:	9-Oct-19
FACE Architecture - Design: Received:		Date:	

FACE Architecture + Design: Resident Engineer's Comments:

PREFER MOOD BOARD - (1) - COMMENTS	<input type="checkbox"/> A - Approved <input checked="" type="checkbox"/> B - Approved as Noted <input type="checkbox"/> C - Incorporate comments Revise & Resubmit <input type="checkbox"/> D - Not Approved
------------------------------------	--

FACE Architecture + Design: RE Signature:		Date:	10-10-2019
Main Contractor Received:		Date:	22/10/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

THE EMPLOYER:		DEVELOPMENT TEAM:	THE ENGINEER:	Date: 01/12/19
FIM STUDENT ACCOMMODATION SPV 1		SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	Signature: AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C.
Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE				

SAMPLE TAG SUBMITTAL	Ref. No.	ST/C/069
	Rev. No.	0

Material Detail

Item Description	PROPOSAL TILE SAMPLE FOR BACK OF HOUSE AREA (BOH) - FLOOR AND WALL - GREY - SERIAL NO 012 (DREAMHOUSE)	List of Enclosure (Tick the Related Box) <input type="checkbox"/> Vendor's Technical Literature <input type="checkbox"/> Compliance Statement <input type="checkbox"/> Previous Test Results <input type="checkbox"/> Copy of the Related Specs. <input checked="" type="checkbox"/> Sample <input type="checkbox"/> List of Previous Projects Done <input type="checkbox"/> Others (Specify): <input type="checkbox"/> INDUSTRIAL LICENCE
Specs. / BOQ / Drwg. Reference	ARCH SPEC SECTION M40	
Material Specified		
Material Proposed	TILE SAMPLE FOR BACK OF HOUSE AREA (BOH) - FLOOR AND WALL - GREY - SERIAL NO 012 (DREAMHOUSE)	
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	
Reason for Alternative		
Remarks		

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.


Main Contractor Signature: Abraham Jacob	Date: 3-Dec-19
FACE Architecture + Design: Received:	Date:

FACE Architecture + Design: Resident Engineer's Comments:

TILE HAS BEEN REPLACED WITH UPT-01 - COLOR / FINISH AS PER MEETING DISCUSSION WITH CLIENT ON 4-DEC-2019	<input type="checkbox"/> A - Approved <input checked="" type="checkbox"/> B - Approved as Noted <input checked="" type="checkbox"/> C - Incorporate comments Revise & Resubmit <input type="checkbox"/> D - Not Approved
--	---

FACE Architecture + Design: RE Signature: [Signature]	Date: 4/12/19
Main Contractor Received: [Signature]	Date: 04/12/19



Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THE CONTRACTOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	Signature:  AROMA INTERNATIONAL BUILDING CONTRACTING LLC


Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE

SAMPLE TAG SUBMITTAL	Ref. No.	ST/C/072
	Rev. No.	2

Material Detail


Item Description	PROPOSAL TILE SAMPLE FOR EXTERNAL WALL - CODE NO 011 (DREAMHOUSE)	List of Enclosure (Tick the Related Box) <input type="checkbox"/> Vendor's Technical Literature <input type="checkbox"/> Compliance Statement <input type="checkbox"/> Previous Test Results <input type="checkbox"/> Copy of the Related Specs. <input checked="" type="checkbox"/> Sample <input type="checkbox"/> List of Previous Projects Done <input type="checkbox"/> Others (Specify): <input type="checkbox"/> INDUSTRIAL LICENCE
Specs. / BOQ / Drwg. Reference	ARCH SPEC SECTION M40	
Material Specified		
Material Proposed	TILE SAMPLE FOR EXTERNAL WALL - CODE NO 011 (DREAMHOUSE)	
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	
Reason for Alternative	No Objection  7-01-20	
Remarks	FIM No objection  08.1.20	

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature:  Abraham Jacob	Date: 6-Jun-20
FACE Architecture + Design: Received:	Date:

FACE Architecture + Design: Resident Engineer's Comments:

# No OBJECTION FOR SAMPLE.	<input type="checkbox"/> A - Approved <input checked="" type="checkbox"/> B - Approved as Noted <input type="checkbox"/> C - Incorporate comments Revise & Resubmit <input type="checkbox"/> D - Not Approved

FACE Architecture + Design: RE Signature: 	Date: 06/01/2020
---	------------------

Main Contractor Received:	Date:
---------------------------	-------

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	Date: 8/12/19
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	Signature: AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C. ARCHITECTURE + DESIGN

Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE

SAMPLE TAG SUBMITTAL	Ref. No.	ST/C/073
	Rev. No.	0

Material Detail

Item Description	PROPOSAL TILE SAMPLE FOR COUNTER TOP - KITCHEN CABINET AND VANITY COUNTER - CRYSTAL NANO WHITE (DREAMHOUSE)	List of Enclosure (Tick the Related Box) <input type="checkbox"/> Vendor's Technical Literature <input type="checkbox"/> Compliance Statement <input type="checkbox"/> Previous Test Results <input type="checkbox"/> Copy of the Related Specs. <input checked="" type="checkbox"/> Sample <input type="checkbox"/> List of Previous Projects Done <input type="checkbox"/> Others (Specify): <input type="checkbox"/> INDUSTRIAL LICENCE
Specs. / BOQ / Drwg. Reference	ARCH SPEC SECTION M40	
Material Specified		
Material Proposed	TILE SAMPLE FOR COUNTER TOP - KITCHEN CABINET AND VANITY COUNTER - CRYSTAL NANO WHITE (DREAMHOUSE)	
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	
Reason for Alternative	SHG No Objection 10/12/19	
Remarks	FIM NO OBJECTION 11.12.2019	

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature:	Abraham Jacob	Date:	8-Dec-19
FACE Architecture + Design: Received:		Date:	

FACE Architecture + Design: Resident Engineer's Comments:

* RATE TO BE APPROVED BY CLIENT	<input type="checkbox"/> A - Approved <input checked="" type="checkbox"/> B - Approved as Noted <input type="checkbox"/> C - Incorporate comments Revise & Resubmit <input type="checkbox"/> D - Not Approved
* CONFIRM PC RATE FOR THIS SAMPLE	
RATE — ?	
For RATE please Refer the Document Transmittal No. DTF-322 N. K. Singh	

FACE Architecture + Design: RE Signature:	12-8-2019
Main Contractor Received:	11/12/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THE CONTRACTOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY LLC	FACE ARCHITECTURE + DESIGN	Date: 15/12/19 AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C.

Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE

SAMPLE TAG SUBMITTAL

Ref. No.

ST/C/077

Rev. No.

0

Material Detail

List of Enclosure

(Tick the Related Box)

Item Description	PROPOSAL TILE SAMPLE FOR GARBAGE ROOM AND JANITOR ROOM - 200X200 SIZE - WALL AND FLOOR - (DREAMHOUSE)	<input type="checkbox"/> Vendor's Technical Literature
Specs. / BOQ / Drwg. Reference	ARCH SPEC SECTION M40	<input type="checkbox"/> Compliance Statement
Material Specified		<input type="checkbox"/> Previous Test Results
Material Proposed	TILE SAMPLE FOR GARBAGE ROOM AND JANITOR ROOM - 200X200 SIZE - WALL AND FLOOR - (DREAMHOUSE)	<input type="checkbox"/> Copy of the Related Specs.
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	<input checked="" type="checkbox"/> Sample
Reason for Alternative	NO OBJECTION <i>Dufin 17/12/19</i>	<input type="checkbox"/> List of Previous Projects Done
Remarks		<input type="checkbox"/> Others (Specify):
		<input type="checkbox"/> INDUSTRIAL LICENCE

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature:

Abraham Jacob

Date:

15-Dec-19

FACE Architecture + Design: Received:

Date:

FACE Architecture + Design: Resident Engineer's Comments:

GARBAGE ROOM & JANITOR ROOM - CERAMIC	<input type="checkbox"/> A - Approved
FLOOR & WALL TO BE SAME SIZE	<input checked="" type="checkbox"/> B - Approved as Noted
WALL - GLOSSY WHITE / MATT FOR FLOOR	<input type="checkbox"/> C - Incorporate comments Revise & Resubmit
	<input type="checkbox"/> D - Not Approved

FACE Architecture + Design: RE Signature:

[Signature]

Date:

16/12/19

Main Contractor Received:

Date:

19/12/19

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

THE EMPLOYER:	DEVELOPMENT TEAM:	THE ENGINEER:	THE CONTRACTOR:
FIM STUDENT ACCOMMODATION SPV 1	SHG STRATEGIC HOUSING GROUP CONSULTANCY L.L.C.	FACE ARCHITECTURE + DESIGN	AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C.

Project: Off Campus Student Housing Facility on Plot No.8120287 at Dubai International Academic City - Dubai UAE


SAMPLE TAG SUBMITTAL	Ref. No.	ST/C/078
	Rev. No.	2

Material Detail

List of Enclosure



Item Description	PROPOSAL TILE SAMPLE FOR LAUNDRY WALL - 330X500 SIZE - (DREAMHOUSE)	(Tick the Related Box)
Specs. / BOQ / Drwg. Reference	ARCH SPEC SECTION M40	<input type="checkbox"/> Vendor's Technical Literature
Material Specified		<input type="checkbox"/> Compliance Statement
Material Proposed	TILE SAMPLE FOR LAUNDRY WALL - 330X500 SIZE - (DREAMHOUSE)	<input type="checkbox"/> Previous Test Results
Manufacturer / Local Supplier	M/S, DREAM HOUSE BUILDING MATERIAL TRADING LLC	<input type="checkbox"/> Copy of the Related Specs.
Reason for Alternative	No Objections Csch 17-01-20	<input checked="" type="checkbox"/> Sample
Remarks	FIM NO OBJECTION Csch 08.1.20	<input type="checkbox"/> List of Previous Projects Done
		<input type="checkbox"/> Others (Specify):
		<input type="checkbox"/> INDUSTRIAL LICENCE

Main Contractor Statement: We certify that the material submitted herewith has been reviewed in details and in compliance with the contract drawings and specifications except as otherwise stated here above.

Main Contractor Signature:		Date:	6-Jan-20
FACE Architecture + Design: Received:		Date:	

FACE Architecture + Design: Resident Engineer's Comments:

FACE: NO OBJECTION FOR SAMPLE	<input type="checkbox"/> A - Approved
	<input checked="" type="checkbox"/> B - Approved as Noted
	<input type="checkbox"/> C - Incorporate comments Revise & Resubmit
	<input type="checkbox"/> D - Not Approved

FACE Architecture + Design: RE Signature:		Date:	06/01/2020
Main Contractor Received:		Date:	09/01/2020

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project.

Client: Abdulla Jassem Mohd Jassem Bin Kalban



MATERIAL SUBMITTAL

Project: PROPOSED G+1 VILLA ON PLOT NO: 375-1615 AT AL BARSHA THIRD, DUBAI

Contractor: BUILDMARK CONTRACTING L.L.C Request No. MAT/1706- 08

WE REQUEST APPROVAL OF THE FOLLOWING MATERIALS

☐ Architectural ☒ Civil / Structural ☐ Services ☐ Other

Material Specified	RAK Ceramics	Material Description	Ceramic Wall Tiles		
Location to be Used	Toilet, Kitchen, Laundry, Storage Areas	Spec. Ref.	Page H/2	Section-H Finishes	Floor Finishes
Supplier	Dream House Building Materials	Local Agent			
Manufacturer	RAK Ceramics	Samples	<input checked="" type="checkbox"/> Included <input type="checkbox"/> Not Included		
Brochure / Literature	<input type="checkbox"/> Included <input type="checkbox"/> Not Included				

Attachment: RAK ceramic sample Ceramic wall tiles no. (i) Allica LBE 25x40 (ii) Allica DBE 25x40 (iii) Allica LGY 25x40 (iv) Allica DGY 25x40 (v) SALI LBE 25x40 (vi) NLAN LBL 25x40

Zachariah Habib (Procurement Department)

Tarek Sersawy (Projects Manager)

Signature & Date: [Signature] 01/02/2018

Signature & Date: _____

A. Consultant comments: Name & Signature _____

Date 04.02.2018

<u>Khaled Tarek Sersawy</u> To refer to MAT/1706-07

☐ Approved ☐ Approved with Comments ☐ Resubmit ☐ Rejected

B. Client comments: Name & Signature _____ Date _____

☐ Approved ☐ Approved with Comments ☐ Resubmit ☐ Rejected

Client: Abdulla Jassem Mohd Jassem Bin Kalban



MATERIAL SUBMITTAL

Project: PROPOSED G+1 VILLA ON PLOT NO: 375-1615 AT AL BARSHA THIRD, DUBAI

Contractor: BUILDMARK CONTRACTING L.L.C

Request No. MAT/1706- 07

WE REQUEST APPROVAL OF THE FOLLOWING MATERIALS

☐ Architectural

☒ Civil / Structural

☐ Services

☐ Other

Material Specified	RAK Ceramics
Location to be Used	Kitchen, Laundry, Maid room, Toilet, Storage Areas
Supplier	Dream House Building Materials
Manufacturer	RAK Ceramics
Brochure / Literature	<input type="checkbox"/> Included <input type="checkbox"/> Not Included

Material Description	Ceramic Floor Tiles		
Spec. Ref.	Page H/2	Section-H Finishes	Floor Finishes
Local Agent			
Samples	<input checked="" type="checkbox"/> Included <input type="checkbox"/> Not Included		

Attachment: RAK ceramic sample Ceramic tiles no. (i)PRM-GREY 33x33 (ii) PRM Ivory- 33x33 (iii)PRM White-33x33 (iv) Allica LBE 41.6x41.6 (v) Allica LG 41.6x41.6 (vi) Glimmer Ivory 41.6x41.6

Zachariah Habib (Procurement Department)

Tarek Sersawy (Projects Manager)

Signature & Date: [Signature] 01/02/2018

Signature & Date: _____

A. Consultant comments: Name & Signature _____

Architectural Engineering Consultants Date 01/02/2018

~~KITCHEN Floor: ALICA LBE 40x40 / Kitchen walls: No full tile & backings only point & splash back (to be discussed with the client)~~
~~Toilet GF: floor - ALICA LG 41.6x41.6~~
~~Walls - ALICA LG 25x40~~
Note: These kind of tiles once selected will show the Terracotta color

☐ Approved

☒ Approved with Comments

☐ Resubmit

☐ Rejected

B. Client comments: Name & Signature _____

Date _____

Kitchen: ALICA LBE 40x40
Toilet - ALICA LG 41.6x41.6
Dining Room: ALICA LBE 40x40
Store: ALICA LBE 40x40

☒ Approved

☐ Approved with Comments

☐ Resubmit

☐ Rejected

SUBMITTAL COVER SHEET



NAME OF PROJECT: DIFC Phase 3		Submittal No:	ATS-DIFC-50812-MA-AF-010
Project No.	50812	Revision No:	00
Client:	DIFC / Turner & Townsend International	Submittal Date:	24-Jul-2019
Consultant:	M/s. Bluehaus Group	Title:	Architectural
Contractor:	M/s. Al Tayer Stocks LLC	Drawing No:	

FIRST SUBMITTAL OF THIS ITEM ☒ OR RESUBMITTAL ☐

TYPE OF SUBMITTAL

- | | | |
|--|--|--|
| <input type="checkbox"/> Shop Drawings & Schedules | <input type="checkbox"/> Method Statement | <input type="checkbox"/> Preliminary As Built Drawings |
| <input checked="" type="checkbox"/> Samples | <input type="checkbox"/> Programme | <input type="checkbox"/> As Built Drawings |
| <input checked="" type="checkbox"/> Materials & Product Data | <input type="checkbox"/> Mock-up & QC panel | <input type="checkbox"/> O & M Manuals |
| <input type="checkbox"/> Certification & Verification of Performance | <input type="checkbox"/> Inspection & Test Reports | <input type="checkbox"/> Other - Please specify |

DESCRIPTION

Ceramic Tile Mid Grey - (A06GZSUR-MGY.M0R)		SUB CONTRACTOR / MANUFACTURER M/s. Dream House
Specification & BOQ Ref: CT-2	Location / Use: Male and Female Toilets, Pantries, Prayer Room, Ablution Areas.	

DESIGN CONSULTANT'S COMMENTS

Contractor to refer to comments on Shop Drawings.
Grout Color to match tile color.
Contractor to install as per manufacturers recommendations.

CONTRACTOR'S REVIEW

The contractor has reviewed this submission prior to submission to the Consultant

Signature _____

SUBMITTAL REVIEW STATUS

- | | |
|---------------------------------------|------------------------|
| <input type="checkbox"/> A | Approved |
| <input checked="" type="checkbox"/> B | Approved with Comments |
| <input type="checkbox"/> C | Rejected |
| <input type="checkbox"/> D | Not Reviewed |

DATE RECEIVED

DATE RETURNED

DESIGN CONSULTANT'S SIGNATURE

For and on behalf of Consultant

Amber Peters

Date: 29.07.2019

PROJECT MANAGER'S APPROVAL

For and on behalf of Project Manager

Date:

Distribution: Original to Al Tayer Stocks
Copies to: Subcontractors

Approved as per DIFC signature on sample
Date: 20/08/2019

SAMPLE TAG



Toilet
Project Name : DIFC Phase 3 - Refurbishment project

Project No : 50812

Transmittal No : ATS-DIFC-50812-MA-AF-010

Date: 24-July-2019

Rev: 00

Ceramic Tile Mid Grey - (A06GZSUR-MGY.M0R) CT-

AMBER PETERS

2

29.07.2019

☐ A - Approved

☐ C - Revise & Resubmit

☒ B - Approved with Comments

☐ R - Rejected

SUBMITTAL COVER SHEET



NAME OF PROJECT: DIFC Phase 3		Submittal No:	ATS-DIFC-50812-MA-AF-011
Project No.	50812	Revision No:	01
Client:	DIFC / Turner & Townsend International	Submittal Date:	18-Sep-2019
Consultant:	M/s. Bluehaus Group	Title:	Architectural
Contractor:	M/s. Al Tayer Stocks LLC	Drawing No:	

FIRST SUBMITTAL OF THIS ITEM ☒ OR RESUBMITTAL ☐

TYPE OF SUBMITTAL

- | | | |
|--|--|--|
| <input type="checkbox"/> Shop Drawings & Schedules | <input type="checkbox"/> Method Statement | <input type="checkbox"/> Preliminary As Built Drawings |
| <input checked="" type="checkbox"/> Samples | <input type="checkbox"/> Programme | <input type="checkbox"/> As Built Drawings |
| <input checked="" type="checkbox"/> Materials & Product Data | <input type="checkbox"/> Mock-up & QC panel | <input type="checkbox"/> O & M Manuals |
| <input type="checkbox"/> Certification & Verification of Performance | <input type="checkbox"/> Inspection & Test Reports | <input type="checkbox"/> Other - Please specify |

DESCRIPTION

Ceramic Tile Mid Grey - (AM-GZSUR-MG-LP/BRK)-CT-3 to Change (A06GZSUR-MGY.M0R) CT-2

SUB CONTRACTOR / MANUFACTURER

M/s. Dream House

Note: Refer attached approved (A06GZSUR-MGY.M0R) CT-2

Specification & BOQ Ref: CT-2	Location / Use: Male and Female Toilets, Pantries, Prayer Room, Ablution Areas.
---	---

DESIGN CONSULTANT'S COMMENTS

CT 03 is replaced with CT -02 as per DIFC instructions.
Contractor to undertake the installation as per approved shop drawings.

CONTRACTOR'S REVIEW

The contractor has reviewed this submission prior to submission to the Consultant

Signature _____

SUBMITTAL REVIEW STATUS

- | | |
|-------------------------------------|--------------------------|
| <input type="checkbox"/> | Approved |
| <input checked="" type="checkbox"/> | B Approved with Comments |
| <input type="checkbox"/> | C Rejected |
| <input type="checkbox"/> | D Not Reviewed |

DATE RECEIVED

DATE RETURNED

DESIGN CONSULTANT'S SIGNATURE

For and on behalf of Consultant

S. SIDDIQUI.

Date: 29.09.2019

PROJECT MANAGER'S APPROVAL

For and on behalf of Project Manager

Date: _____

Distribution: Original to Al Tayer Stocks
Copies to: Subcontractors

SUBMITTAL COVER SHEET



NAME OF PROJECT: DIFC Phase 3		Submittal No:	ATS-DIFC-50812-MA-AF-010
Project No.	50812	Revision No:	00
Client:	DIFC / Turner & Townsend International	Submittal Date:	24-Jul-2019
Consultant:	M/s. Bluehaus Group	Title:	Architectural
Contractor:	M/s. Al Tayer Stocks LLC	Drawing No:	

FIRST SUBMITTAL OF THIS ITEM ☒ OR RESUBMITTAL ☐

TYPE OF SUBMITTAL

- | | | |
|--|--|--|
| <input type="checkbox"/> Shop Drawings & Schedules | <input type="checkbox"/> Method Statement | <input type="checkbox"/> Preliminary As Built Drawings |
| <input checked="" type="checkbox"/> Samples | <input type="checkbox"/> Programme | <input type="checkbox"/> As Built Drawings |
| <input checked="" type="checkbox"/> Materials & Product Data | <input type="checkbox"/> Mock-up & QC panel | <input type="checkbox"/> O & M Manuals |
| <input type="checkbox"/> Certification & Verification of Performance | <input type="checkbox"/> Inspection & Test Reports | <input type="checkbox"/> Other - Please specify |

DESCRIPTION

Ceramic Tile Mid Grey - (A06GZSUR-MGY.M0R)		SUB CONTRACTOR / MANUFACTURER M/s. Dream House
Specification & BOQ Ref: CT-2	Location / Use: Male and Female Toilets, Pantries, Prayer Room, Ablution Areas.	

DESIGN CONSULTANT'S COMMENTS

Contractor to refer to comments on Shop Drawings.
Grout Color to match tile color.
Contractor to install as per manufacturers recommendations.

CONTRACTOR'S REVIEW

The contractor has reviewed this submission prior to submission to the Consultant

Signature _____

SUBMITTAL REVIEW STATUS

- | | |
|---------------------------------------|------------------------|
| <input type="checkbox"/> A | Approved |
| <input checked="" type="checkbox"/> B | Approved with Comments |
| <input type="checkbox"/> C | Rejected |
| <input type="checkbox"/> D | Not Reviewed |

DATE RECEIVED

DATE RETURNED

DESIGN CONSULTANT'S SIGNATURE

For and on behalf of Consultant

Amber Peters

Date: 29.07.2019

PROJECT MANAGER'S APPROVAL

For and on behalf of Project Manager

Date:

Distribution: Original to Al Tayer Stocks
Copies to: Subcontractors

Approved as per DIFC signature on sample
Date: 20/08/2019

SAMPLE TAG



Tablet
Project Name : DIFC Phase 3 - Refurbishment project

Project No : 50812

Transmittal No : ATS-DIFC-50812-MA-AF-010

Date: 24-July-2019

Rev: 00

Ceramic Tile Mid Grey - (A06GZSUR-MGY.M0R) CT-

AMBER PETERS

2

29.07.2019

☐ A - Approved

☐ C - Revise & Resubmit

☒ B - Approved with Comments

☐ R - Rejected

SUBMITTAL COVER SHEET



NAME OF PROJECT: DIFC Phase 3		Submittal No:	ATS-DIFC-50812-MA-AF-009
Project No.	50812	Revision No:	00
Client:	DIFC / Turner & Townsend	Submittal Date:	24-Jul-2019
Consultant:	M/s. Bluehaus Group	Title:	Architectural
Contractor:	M/s. Al Tayer Stocks LLC	Drawing No:	
FIRST SUBMITTAL OF THIS ITEM <input checked="" type="checkbox"/>		OR RESUBMITTAL <input type="checkbox"/>	
TYPE OF SUBMITTAL			
<input type="checkbox"/> Shop Drawings & Schedules <input type="checkbox"/> Method Statement <input type="checkbox"/> Preliminary As Built Drawings			
<input checked="" type="checkbox"/> Samples <input type="checkbox"/> Programme <input type="checkbox"/> As Built Drawings			
<input checked="" type="checkbox"/> Materials & Product Data <input type="checkbox"/> Mock-up & QC panel <input type="checkbox"/> O & M Manuals			
<input type="checkbox"/> Certification & Verification of Performance <input type="checkbox"/> Inspection & Test Reports <input type="checkbox"/> Other - Please specify			
DESCRIPTION			
Ceramic Tile Cool Grey - (A06GZSUR-CGY.M0R)		SUB CONTRACTOR / MANUFACTURER M/s. Dream House	
Specification & BOQ Ref: CT-1	Location / Use: Male and Female Toilets, Pantries, Prayer Room, Ablution Areas.		
DESIGN CONSULTANT'S COMMENTS			
Contractor to refer to comments on Shop Drawings. Grout Color to match tile color. Contractor to install as per manufacturers recommendations.			
CONTRACTOR'S REVIEW		SUBMITTAL REVIEW STATUS	
The contractor has reviewed this submission prior to submission to the Consultant		<input type="checkbox"/> A Approved <input checked="" type="checkbox"/> B Approved with Comments <input type="checkbox"/> C Rejected <input type="checkbox"/> D Not Reviewed	
Signature _____			
DATE RECEIVED		DATE RETURNED	
DESIGN CONSULTANT'S SIGNATURE			
For and on behalf of Consultant		Date: 29.07.2019	
Amber Peters			
PROJECT MANAGER'S APPROVAL			
For and on behalf of Project Manager		Date: 20/08/19	
Distribution: Original to Al Tayer Stocks		Approved as per DIFC signature	
Copies to: Subcontractors		on sample	

Project Name : DIFC Phase 3 - Refurbishment project

Project No : 50812

Transmittal No : ATS-DIFC-50812-MA-AF-009

Date: 24-July-2019

Rev: 00

Ceramic Tile Cool Grey - (A06GZSUR-CGY.M0R) CT-

AMBER PETERS

1

29.07.2019

☐ A - Approved

☐ C - Revise & Resubmit

☒ B - Approved with Comments

☐ R - Rejected



Shapoorji Pallonji Mideast LLC

**MATERIAL
INSPECTION REQUEST**

CONTRACT NO. 1353
 CONTRACT TITLE MUDON TOWN HOUSES
 CONTRACTOR SHAPOORJI PALLONJI MIDEAST LLC
 SUBCONTRACTOR

MIR NO SPML/MUD/A&B/MIR-263
 REVISION NO 0
 REVISION DATE 13/11/2013
 TITLE PORCELINE TILES 50X50
 DISCIPLINE CIVIL
 DATE OF INSPECTION 14/11/2013

PRODUCT NAME PROCELINE TILES (50B127)
 MANUFACTURER

SAMPLE PROVIDED
 SUPPLIER DREAM HOUSE 2

DETAILS OF MATERIAL / EQUIPMENT

Manufacturer:

Model No.

Country of origin: CHINA

Material Submittal ref. No. SPML/A&B/SC-02

B.O.Q. ref.:

Specification ref. VOL 2, SEC-8

Storage location: MAIN STORE

Serial No.

Date of approval: 27.7.2013

Quantity: 2592 SQM

Delivery no. 3120

Delivery date 10.11.2013

Contractor's Authorised Signature

Date

13/11/2013

INSPECTION REPORT

Physical damage?

Details given above correct?

Conform with approved submittal?

Accessories / spare parts included?

Details:

Remarks:

☐ Yes☒ Yes☒ Yes☐ Yes☒ No☐ No☐ No☒ NoShapoorji Pallonji Mideast (LLC)
Mudon Town Houses @ Al Ruwayah

17 NOV 2013

RECEIVED

Sign:

Time: 9:12 AM

The above material has been inspected at site and found at the time inspection of to be

☒ Satisfactory☐ Un-Satisfactory

For incorporation into complete work -

x Randomly checked one box.

x Contractor to ensure the material received shall match with the approved signed sample by client.

Project Manager

Date

Resident Engineer

Date

14/11/13

14/11/13



Ref. AP/309/GB/65

June 24, 2019

To,

M/s. Global Green Bridge Contracting LLC
P O Box: 84088
Dubai, UAE.

Attn. : Mr. Krishna Mohan Rao (Area Manager)

Project : B+G+7 – 2 Star Hotel Building on Plot No. AFC006B at Al Furjan, Dubai

Subject : Nomination for Supply of sanitarywares for guest room toilet

Dear Sir,

We hereby notify you that "The Employer" has nominated **"M/s. Dream House building materials trading LLC"** for supply of the sanitarywares from RAK Ceramic for the guest room toilets, as per the list given in the approved quotation.

Accordingly, we enclose their approved quotation ref. no.DH-JUN-8322-19 revision-1 dated 11/6/19 amounting **Dh. 159,075.00**, for placing order with the vendor. Kindly note that concealed cisterns are available ex-stock with the nominated supplier for your immediate procurement.

You are requested to submit list with quantity of balance sanitarywares for other areas with location details, at the earliest, to enable client issue approved quotation for the same.

This being a P.S item (item 'A' on P.No. B-13/3 of 5, bill no.13 in Vol-III of the contract documents), adjustment in the contract amount shall be done accordingly, in due course of time.

With Regards,

Yours truly,
For arkiplan consulting architects and engineers

A handwritten signature in black ink, appearing to read 'Girish Shah', is written over a circular stamp. The stamp contains the text 'GIRISH SHAH' and 'Project Manager'.



GIRISH SHAH
Project Manager

Cc: Client,
AP- HO

Enclosure: Quotation Ref: DH-JUN-8322-19

SUBMITTAL COVER SHEET



WEWORK Office Fit out at Al Khatem Tower		Submittal No:	ATS/WW/55139/MA/AF-003
Project No.	55139	Revision No:	1
Client:	M/s WEWORK	Submittal Date:	2-Sep-19
Consultant		Title:	Material Submission
Contractor:	Al Tayer Stocks LLC	Drawing No:	
FIRST SUBMITTAL OF THIS ITEM <input type="checkbox"/>		OR RESUBMITTAL <input checked="" type="checkbox"/>	
TYPE OF SUBMITTAL			
<input type="checkbox"/> Shop Drawings & Schedules	<input type="checkbox"/> Method Statement	<input type="checkbox"/> Preliminary As Built Drawings	
<input checked="" type="checkbox"/> Samples	<input type="checkbox"/> Programme	<input type="checkbox"/> As Built Drawings	
<input type="checkbox"/> Materials & Product Data	<input type="checkbox"/> Mock-up & QC panel	<input type="checkbox"/> O & M Manuals	
<input type="checkbox"/> Certification & Verification of Performance	<input type="checkbox"/> Inspection & Test Reports	<input type="checkbox"/> Other - Please specify	
DESCRIPTION			
20X20 mm Mosaic Tile White - TL 02		SUB CONTRACTOR / MANUFACTURER	
		M/s Roman Mosaico	
Specification & BOQ Ref:	Location / Use:		
TL-02	14, 15 & 16 Floors		
DESIGN CONSULTANT'S COMMENTS			
CONTRACTOR'S REVIEW		SUBMITTAL REVIEW STATUS	
The contractor has reviewed this submission prior to submission to the Consultant		<input checked="" type="checkbox"/> A Approved <input type="checkbox"/> B Approved with Comments <input type="checkbox"/> C Rejected <input type="checkbox"/> D Not Reviewed	
Signature 			
DATE RECEIVED		DATE RETURNED	
DESIGN CONSULTANT'S SIGNATURE			
For and on behalf of Consultant		Date: 03.09.18	
			
PROJECT MANAGER'S APPROVAL			
For and on behalf of Project Manager		Date:	
Distribution: Original to Al Tayer Stocks Copies to: Subcontractors			

SUBMITTAL COVER SHEET



WEWORK Office Fit out at Al Khatem Tower		Submittal No:	ATS/WW/55139/MA/AF-002
Project No.	55139	Revision No:	1
Client:	M/s WEWORK	Submittal Date:	2-Sep-19
Consultant		Title:	Material Submission
Contractor:	Al Tayer Stocks LLC	Drawing No:	

FIRST SUBMITTAL OF THIS ITEM ☐ OR RESUBMITTAL ☒

TYPE OF SUBMITTAL

- | | | |
|--|--|--|
| <input type="checkbox"/> Shop Drawings & Schedules | <input type="checkbox"/> Method Statement | <input type="checkbox"/> Preliminary As Built Drawings |
| <input checked="" type="checkbox"/> Samples | <input type="checkbox"/> Programme | <input type="checkbox"/> As Built Drawings |
| <input type="checkbox"/> Materials & Product Data | <input type="checkbox"/> Mock-up & QC panel | <input type="checkbox"/> O & M Manuals |
| <input type="checkbox"/> Certification & Verification of Performance | <input type="checkbox"/> Inspection & Test Reports | <input type="checkbox"/> Other - Please specify |

DESCRIPTION

20X20 mm Mosaic Tile Black - TL 03		SUB CONTRACTOR / MANUFACTURER
		M/s Roman Mosaico
Specification & BOQ Ref:	Location / Use:	
TL-03	14, 15 & 16 Floors	

DESIGN CONSULTANT'S COMMENTS

--

CONTRACTOR'S REVIEW

The contractor has reviewed this submission prior to submission to the Consultant

Signature

DATE RECEIVED

SUBMITTAL REVIEW STATUS

- ☒ A Approved
☐ B Approved with Comments
☐ C Rejected
☐ D Not Reviewed

DATE RETURNED

DESIGN CONSULTANT'S SIGNATURE

For and on behalf of Consultant

Nickie Capwford

Date: 03.09.18

PROJECT MANAGER'S APPROVAL

For and on behalf of Project Manager

Date:

Distribution: Original to Al Tayer Stocks
 Copies to: Subcontractors

	UPDATED
	SCANNED
	CLOSED

AROMA INTERNATIONAL ACTION LIST & DISTRIBUTION

No. 0044

Project : HIGHBURY (SH-04), G+1P+29+MF+R Residential Apartment Building

Reference No. P472-TRN-MAT-ARO-GEC-083

Company : GULF ENGINEERING & CONSULTANTS

Date : 28/Sep/2024

Subject : Material - Vanity Wall, Kitchen Backsplash & Shower Floor Tiles

☒ Original ☐ Copy

STATUS: Approved as Noted

Date Received : 8/Oct/2024

Received By: ☐ Hand ☐ Fax ☐ E-Mail ☐ Mail ☐ Other ☐ Cost Estimate ☐ Shop Drawing ☐ Letter ☐ Fax ☐ Soft File ☐ Other

Remarks:

Signature:

Document Controller

Date : 8/Oct/2024

[A][IF] MD [A][IF] PM [A][IF] *Dream House* [A][IF] Other.....
 [A][IF] GM [A][IF] *Paul* CM [A][IF] Other.....
 [A][IF] Finance Mngr. [A][IF] MEP. Mngr. [A][IF] Other.....
 [A][IF] HR Manager [A][IF] MEP [A][IF] Other.....
 [A][IF] Logistics Mngr. [A][IF] PE [A][IF] Other.....
 [A][IF] Purchase Mngr. [A][IF] HSE [A][IF] Other.....
 [A][IF] Sr. P. Coordinator [A][IF] Other.....

Dream house: comply and Resubmit all mentioned tile

Signature:

Satheesh Kumar A.P, Project Manager

Date : 08/10/2024

Remarks: 1

Signature:

Date :

Remarks:2

Signature:

Date :

Remarks:3

Signature:

Date :

CLIENT

CONSULTANT

MEP CONSULTANT

CONTRACTOR

SUBMITTAL TRANSMITTAL SHEET - MATERIAL SUBMITTAL

Project Name:

SH4 (Highbury)- G+1P+29+MF+R Residential Apartment Building on Plot No. 3479482 Sobha Hartland, Dubai, U.A.E.

Project No.:

J222

Date:

28-Sep-2024

Submittal No.:

P472-TRN-MAT-ARO-GEC-083

Revision:

Submittal Title:

Material Submittal for Vanity Wall, Kitchen Backsplash & Shower Floor Tiles

Item No.	Reference Number	Description	Type	Copies	Remarks
1		Material Submittal for Vanity Wall, Kitchen Backsplash & Shower Floor Tiles TL-06, TL-07	MAT	1	

TYPE: SD= Shop Drawings, MAT= Material Submittal, PQ= Prequalification, MS= Method Statement, WPR= Weekly Progress Report, SM= Sample, GT= Guarantee, MD= Manufacturer's Data, CT= Certificates, TT= Test Results, OT= Other

supplier: Dream House Building Material L.L.C

We certify that the documents / materials submitted herewith have been reviewed in detail and are in strict conformance with the contract drawings and specifications except as otherwise stated.

Contractor Name:

Eng. Abraham Jacob

Project Manager

Signature:

Rcv'd By:

Date:

Consultant Review Comments

Please refer to the attached comment sheet.

NO OBJECTION SUBJECT TO COMPLY WITH PROJECT SPEC & DRAWINGS

SIZES SHOULD MATCH WITH SPECIFIED.

TL-07A HEXAGON SHAPE MOSAIC TILE PENDING

28/09/24

AROMA

Consultant Decision

☐ Approved

☒ Approved As Noted

☐ Not Approved

☐ Not Required

AROMA

RECEIVED

28 SEP 2024

Consultant:

Engr. Mabdaa Ali Al Shujairi

Resident Engineer

Gulf Engineering and Consultants

Signature:

Rcv'd By:

Date:

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the requirements of The Contract. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all quantities and dimensions, selecting fabrication processes and techniques of construction, coordinating his work with that of other trades and performing his work in a safe and satisfactory manner.

Copy to:

Head Office

Consultant

QS

Sheet No. _____ of _____

Send to Ajith / Nessim

Approved As Noted
07/10/24

0402074



الخليج للهندسة والاستشارات
GULF ENGINEERING & CONSULTANTS


المهندسان / فهد حسين درويش وحسام حسين درويش
gulfeng@emirates.net.ae ☎ 04-2214 524 | 04 2284 195 📠

Project Name:	SH4 Residential Building for M/s Ellington Properties on Plot No. 3479482, Sobha Hartland, Dubai, UAE	Project No:	P472
		Date:	01-Oct-2024
Submittal No.:	P472-TRN-MAT-ARO-GEC-083	Revision:	00
Submittal Title:	Material Submittal for Vanity Wall, Kitchen Backsplash & Shower Floor Tiles		

Consultant's Comments

No Objection subject to compliance with the comments:

- To Comply with the approved sample by the client.
- To comply with project specs & ID Drawings.
- Contractor to submit detailed shop drawings and method statements for review and approval.
- MIR to be submitted upon delivery at site.
- Mock-up to be provided at the site for approval.
- Chipped edges will not be accepted and joints to be aligned properly.
- All required coordination with other activities, works, subcontractors, etc. is the main contractor's responsibility.
- The final quantity is the main contractor's responsibility.
- Tiles grout, adhesive, and accessories are to be submitted separately for selection & Approval.

Consultant:	Signature: 	Received By:	
Gulf Engineering & Consultants Engineer Mabdaa Ali Alshujairi Resident Engineer		Date:	

TL-06
KITCHEN & VANITY WALL
BACKSPLASH

SH4: The Highbury
Vanity & Backsplash.

No objection on color & finish.
Glossy finish.

Jana Diab
04.04.24

BOOST BEIGE

CODE : BOOST BEIGE
ITEM : PORCELAIN
SIZE : 300X600 mm
THICK : 9.0 MM
AREA :



SH4: The Highbury

✓ Approved

Shower flooring @ Premium Apart.
Bathroom

Jana Diab
9. Sept. 24

TL-07

PREMIUM BATH
SHOWER - FLOOR.

CLIENT	CONSULTANT	CONTRACTOR
		

SUBMITTAL TRANSMITTAL SHEET - PREQUALIFICATION SUBMITTAL


Project Name:	HIGHBURY - G+1P+29+MF+R RESIDENTIAL APARTMENT BUILDING ON PLOT NO. 3479482, SOBHA HARTLAND, DUBAI, U.A.E.	Project No.:	J222
Submittal No.:	P472-TRN-PQ-ARO-GEC-053	Date:	30-Aug-2024
Submittal Title:	Prequalification submittal For BOH Tiles and Marble Threshold-M/s. Dream House Building Material L.L.C		

ITEM NO.	REFERENCE NUMBER	DESCRIPTION	TYPE	COPIES	REMARKS
1		Prequalification submittal For BOH Tiles M/s. Dream House Building Material L.L.C	PQ	1	

TYPE: SD= Shop Drawings, MAT= Material Submittal, PQ= Prequalification, MS= Method Statement, WPR= Weekly Progress Report, SM= Sample, GT= Guarantee, MD= Manufacturer's Data, CT= Certificates, TT= Test Results, OT= Other

supplier: Dream House Building Material L.L.C

We certify that the documents / materials submitted herewith have been reviewed in detail and are in strict conformance with the contract drawings and specifications except as otherwise stated.

Contractor Name: Eng. Abraham Jacob Project Manager	Signature: 	Rcv'd By:
		Date:

Consultant Review Comments


no objection to the proposed supplier subject to the following:

- To comply with the approved sample by the client.
- To comply with project specs and ID drawing.
- Contractor to submit detailed shop drawing and method statement for review and approval.

⊗ Provide MS/Samples.

Consultant Decision

- ☐ Approved
- ☒ Approved As Noted
- ☐ Not Approved
- ☐ Not Required

Consultant: Engr. Mabdaa Ali Al Shujairi Resident Engineer Gulf Engineering and Consultants	Signature: 	Rcv'd By:
		Date:

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the requirements of the Contract. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all quantities and dimensions, selecting fabrication processes and techniques of construction, coordinating his work with that of other trades and performing his work in a safe and satisfactory manner.

Copy to:	Head Office	Consultant	QS	Sheet No. _____ of _____
----------	-------------	------------	----	--------------------------

Ref : ADX/PAD1003/1143/2024
Date : 18.09.2024

M/s. DREAM HOUSE BUILDING MATERIALS TRADING LLC
P.O. Box: 98197, SHARJAH
UNITED ARAB EMIRATES.

Attn: Mr. Abdul Azees

Dear Sir,

ELLINGTON HOUSE 4 - G+1P+9 STOREY RESIDENTIAL BUILDING AT PLOT No. 6312346, DUBAI HILLS ESTATE, DUBAI, UAE

Sub: **INTIMATION OF NOMINATION FOR SUPPLY OF TILES AND INSTRUCTION TO SUBMIT TECHNICAL DOCUMENTS, SAMPLES & DELIVERY SCHEDULE FOR NOMINATED TILES**
Ref: **Letter No. EH4-MEC-AAC-042 Dated 14.09.2024 from Engineer**

With reference to the above subject, we would like to inform you that we have received instructions from the Engineer, M/s. Model Engineering Consultants, representing the Employer M/s. EH4 Development LLC, nominating and appointing you as the supplier for the Supply of Tiles for the aforementioned project. We herewith enclose a copy of your client-approved Quotation (Ref: DH-AUG-12133-24 Dated 28.08.2024) for your kind perusal.


In continuation of the above, you are hereby instructed to initiate the work by submitting the necessary technical documents and related samples of all the nominated items, enabling us to proceed with obtaining approvals from the Engineer. Also, please submit the Delivery Schedule of all the nominated items matching the Main Contractor's Program, outlining the required duration to complete the material delivery.

Thanking you,

Yours sincerely,
FOR **AL ADRAK CONTRACTING CO. LLC.**

SABU KARINGATTIL,
PROJECT MANAGER.

Encl: As above

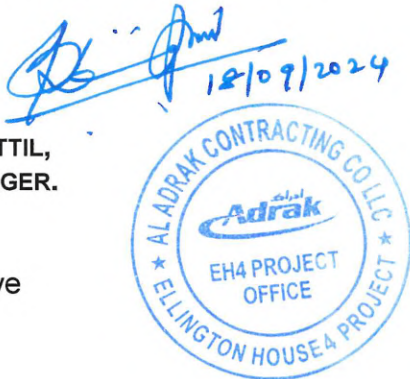

Ref: EH4-MEC-AAC- 042
14th September 2024

M/s Al Adrak Contracting Co. LLC
P.O. Box: 231433
Tel: +971- 48049666
Dubai, UAE.

Attention : Mr. K. Vasu Sabu

Project : Proposed Residential Building (G+P+9+R) On Plot No. 6312346
(DHE 13.0002) at Dubai Hills, Dubai, U.A.E.

Subject : Renomination of Prime Cost Supplier for Tiles

Dear Mr. Sabu,

We refer to our previous correspondence ref: EH4-MEC-AAC-029 dated 8th July 2024 regarding the nomination of suppliers for the Prime Cost (PC) items for tiles in the project.

Due to considerations of better availability, we are renominating a new supplier for the tiles PC items as per the attached proposal. The renominated supplier details are as follows:


- I. M/s. Dream House Building Material Trading LLC
 - o Quotation No: DH-AUG-12133-24 dated 28th August 2024
 - o Prequalification of M/s Dream House
 - o Photos for sample reference


We request you to coordinate with the newly nominated supplier to arrange the supply of the materials, ensuring all necessary engineering work and sample approvals are completed

Please submit the adjustments required for the PC item in accordance with the contract terms and for the Engineer's review and approval.

Thank you for your attention to this matter.

Thanking you,
For MODEL ENGINEERING CONSULTANTS

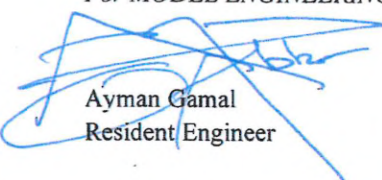
Ayman Gamal
Resident Engineer

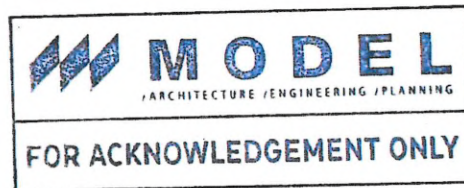

CC:
Mr. Kevin Yates - Ellington
Mr. Vijaya Kumar - Ellington
Mr. Osama Adam - Ellington
Mr. Ahmed Youssef - MEC
Ms. Annie Thomas Alexander - Al Adrak
Mr. Riyas Mohammed - Al Adrak

EH Balcony flooring

✓ Approved

Size to be 1200x200

Jana Diab

9. Sept. 24

Ellington House 2 & 3 & 4

EH flooring Ellington House 2 3 3 4

✓ Approved. No objection on color & finish.

- Veins direction to be flipped.
- Size to be 120 x 60

Jana Diab
9. Sept. 24

Dream House
BUILDING MATERIALS TRADING LLC
Tel: 64 9206641 Fax: 64 9206682 SHAGH- U.A.E
Email: dreamhouseuae@gmail.com

Code: PIETRA BLANCA
Size: 62x1200 mm
Price:

Balcony flooring

✓ Approved

Site to be 1200x200

~~Anna~~ Diab

9. Sept. 24

Ellington House 2 & 3 & 4

AT 32844-1-AM-5

CODE	: PIETRA BLANCO
ITEM	: PORCELAIN
SIZES	: 600X1200 mm
THICK	: 9.0 MM
AREA	



EH flooring Ellington House 2 & 3 & 4

✓ Approved, No objection on color & finish.

• veins direction to be flipped.

• size to be 120 x 60

Jana Diab
9-sept 24

EH Balcony flooring

✓ Approved
Size to be 1200x200

fana Diab
9 sept 24

Ellington House 2 & 3 & 4

CODE	: REGAL WOOD BEIGE
ITEM	: PORCELAIN
SIZES	: 200X1200 mm
THICK	: 9.0 MM
AREA	: BALCONY



EH Balcony flooring

✓ Approved

Size to be 1200x200

Jana Diab

9. Sept. 24


Ellington House 2 & 3 & 4

Material Approval Sheet (MAS)

Reference	MS/WF5/CIVIL/MS-122
Revision	0
Issue date	11 th September 2024

Project Title	PROPOSED 3B+G+P1+15+R MULTI STOREY BLDG. ON PLOT NO-3460597
Client	M/s Fortune 5 Property Development L.L.C
Consultant	M/s VX Studio
Main Contractor	M/s AROMA INTERNATIONAL BLDG. CONTRACTING LLC

Details of material submitted for approval (To be filled by Contractor)

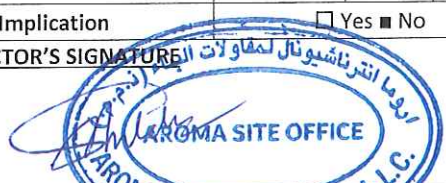Discipline	<input checked="" type="checkbox"/> Civil <input checked="" type="checkbox"/> Architectural <input type="checkbox"/> Structural <input type="checkbox"/> Mechanical <input type="checkbox"/> Electrical <input type="checkbox"/> Plumbing <input type="checkbox"/> Fire Fighting <input type="checkbox"/> Others:		
Material	BOH TILES		
Attachments	<input checked="" type="checkbox"/> Compliance Statement <input checked="" type="checkbox"/> Manufacturer Technical <input checked="" type="checkbox"/> Previous Test Results <input checked="" type="checkbox"/> Sample <input checked="" type="checkbox"/> Suppliers Details <input checked="" type="checkbox"/> List of previous projects done <input type="checkbox"/> Comparative statement <input checked="" type="checkbox"/> Copy of previous approvals <input type="checkbox"/> Others:		
Specific Product Reference	FULL BODY PORCELAIN – MATT TORO SAND 600x600 mm		
Location	BOH AREA		
Purpose	Floor & Wall Tile for BOH Area		
Brand/Manufacturer	OASIS		
Local Supplier	DREAM HOUSE BUILDING MAT.TR.LLC		
Email	N/A	Telephone	N/A
BOQ Reference	N/A	Drawing Reference	N/A
Specification Reference	N/A	BS Reference	N/A
Material Comply with Specification	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		Delivery period after date of approval
Material Required at Site	DD	MM	YYYY
Material Order Critical Date	DD	MM	YYYY
Financial Implication	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		If yes, why:
CONTRACTOR'S SIGNATURE 			
			SEAL, SIGNATURE

Consultant Response

Additional information required	
Comments	
* Refer comments on attached sheet.	
<input type="checkbox"/> Approved <input checked="" type="checkbox"/> Approved/Recommended with Comments <input type="checkbox"/> Resubmit after incorporating additional information required <input type="checkbox"/> Rejected	VX STUDIO CONSULTANCY DATE: 17.09.24 PROJECT: WEST 5 BUILDING, BUSINESS BAY, DUBAI, UAE <input type="checkbox"/> LETTER <input type="checkbox"/> CERTIFICATE <input type="checkbox"/> DOCUMENT SUBMITTAL <input type="checkbox"/> DOCUMENT TRANSMITTAL <input type="checkbox"/> AUTHORITY INSPECTION • S/N _____ • S/N _____ • S/N _____ • S/N _____ • S/N _____ This stamp is intended only for the purpose stated above.
Date of Issue: / /20	

Note: The material is approved in general only. This approval will not relieve the contractor from his responsibility and obligation to fulfil the contract for any error/defects/incorrect setting or improper installation. All the material details within this form should be duly filled by the Contractor.





ANNEXURE

Project: 3B+G+P1+15+R MULTI STOREY BLDG ON PLOT 3460597

Package: CIVIL/ARCHITECTURE

Submittal No.: MS/WF5/CIVIL/MS-122

Submittal Title: BOH TILES

Approval Status: Approved with comments

Engineer's Comments:

- 1 Ensure that the proposed material is in compliance with project specification all technical requirements and warranties. When tested to relevant performance standards porcelain tiles shall exhibit Specification Standard reference & Minimum Requirement.
- 2 Submit a written warranty for the Works of this Section against materials, workmanship and performance defects for ten (10) years. Where any part of the Works of this Section, including design, preparation or installation are sublet to any third party, such party shall provide a collateral warranty equivalent to the warranty for the Works of this Section.
- 3 Layout to be followed as per approved shop drawings.
- 4 All the materials to be used as approved sample and finish.
- 5 Ensure the compatibility of proposed materials with substrates, preparation to be done as per manufacturer's requirement.
- 6 Material storage and handling to be done as per manufacturer's recommendation.
- 7 Ensure compliance with local authorities DCB, DM, DGB etc.
- 8 Sequence of installation to be coordinated with all relevant trades.
- 9 Mock up to be provided on site for review and approval.

VX STUDIO CONSULTANCY		DATE: 17.09.24
PROJECT: WEST 5 BUILDING, BUSINESS BAY, DUBAI, UAE		
<input type="checkbox"/> LETTER		• S/N _____
<input type="checkbox"/> CERTIFICATE		• S/N _____
<input type="checkbox"/> DOCUMENT SUBMITTAL		• S/N _____
<input type="checkbox"/> DOCUMENT TRANSMITTAL		• S/N _____
<input type="checkbox"/> AUTHORITY INSPECTION		• S/N _____
This stamp is intended only for the purpose stated above.		

Dream 2 House
 REALTY WATER & LAND INC.
 10000 Highway 100, Suite 100, Houston, TX 77055
 Email: info@dream2house.com

Code	11222222
Date	6/2/00
Price	

Material Submitter Job No.	MS-WFS-CIVIL-MS-122
Discipline	<input checked="" type="checkbox"/> Civil <input checked="" type="checkbox"/> Architectural <input checked="" type="checkbox"/> Structural <input checked="" type="checkbox"/> Mechanical <input checked="" type="checkbox"/> Electrical <input checked="" type="checkbox"/> Plumbing <input checked="" type="checkbox"/> HVAC
Sample Description	BOH TILES
Manufacturer/Brand	DASIS
Location to be used	BOH AREA
Access	FLOOR & WALL TILE FOR BOH AREA