



**Dream House**  
BUILDING MATERIALS TRADING L.L.C

# wooden

COLLECTION

200X1200MM





**Dream House**  
BUILDING MATERIALS TRADING L.L.C





## CASA BEIGE

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES



12 RANDOM



CASA BEIGE

## FETURES







## CONGO HONEY PINE

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES

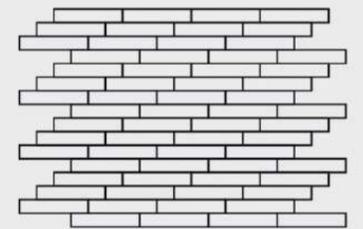

6 RANDOM



CONGO HONEY PINE

## FETURES





**Dream House**  
BUILDING MATERIALS TRADING L.L.C





## CONGO WOOD

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES



6 RANDOM



**CONGO WOOD**

**FETURES**





**Dream House**  
BUILDING MATERIALS TRADING L.L.C





## CORE WOOD BEIGE

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES



8 RANDOM



**CORE WOOD BEIGE**

## FETURES





**Dream House**  
BUILDING MATERIALS TRADING L.L.C





## CORE WOOD RED

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES



8 RANDOM



CORE WOOD RED

## FETURES







## CORE WOOD WHITE

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES

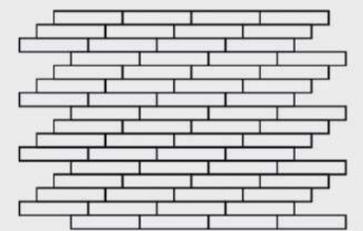



**CORE WOOD WHITE**

**FETURES**









## HARD WOOD GREY

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES

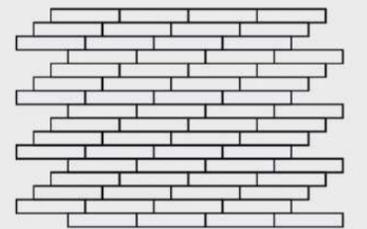



**HARD WOOD GREY**

**FETURES**





**Dream House**  
BUILDING MATERIALS TRADING L.L.C





## REGAL WOOD BEIGE

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES



8 RANDOM



**REGAL WOOD BEIGE**

**FETURES**





**Dream House**  
BUILDING MATERIALS TRADING L.L.C





## SIENNA WOOD OLIVE

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES



5 RANDOM



**SIENNA WOOD OLIVE**

## FETURES





**Dream House**  
BUILDING MATERIALS TRADING L.L.C





## SIENNA WOOD RED

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES



5 RANDOM



**SIENNA WOOD RED**

## FETURES









## TORINO LIGHT GREY

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES



9 RANDOM



**TORINO LIGHT GREY**

## FETURES









## TORINO DARK GREY

SIZE : 200X1200MM

FINISH : MATT

GLAZED VITRIFIED TILES

### LAYING POSSIBILITIES



9 RANDOM



**TORINO DARK GREY**

**FETURES**



# TECHNICAL SPECIFICATION

| CHARACTERISTIC                              | STANDARD AS PER<br>ISO-13006/En14411 GROUP BIa | OUR VALUE                 | TEST METHOD    |
|---|--|---------------------------|----------------|
| <b>REGULATORY PROPERTIES</b>                |  |                           |                |
| Deviation in length & width                 | ± 0.5%   | ± 0.3%                    | ISO - 10545-2  |
| Deviation in thickness                      | ± 0.5%   | ± 4.0%                    | ISO - 10545-2  |
| Straightness in side                        | ± 0.5%   | ± 0.1%                    | ISO - 10545-2  |
| Rectangularity                              | ± 0.5%   | ± 0.1%                    | ISO - 10545-2  |
| Surface flatness                            | ± 0.5%   | ± 0.2%                    | ISO - 10545-2  |
| Color difference                            | Unlterned                                      | No change                 | ISO - 10545-2  |
| Glossiness                                  | As per mfg.                                    | Min 90%                   | GLOSSO METER   |
| <b>STRUCTURAL PROPERTIES</b>                |  |                           |                |
| Water absorption                            | < 0.50%  | < 0.05%                   | ISO - 10545-3  |
| Apparent density                            | > 2.0 g/cc                                     | > 2.10 g/cc               | DIN 51082      |
| <b>MASSIVE MECHANICAL PROPERTIES</b>        |  |                           |                |
| Modulus of repture                          | Min. 35 N/mm <sup>2</sup>                      | Min. 40 N/mm <sup>2</sup> | ISO - 10545-4  |
| breaking strength                           | Min. 1300 N                                    | Min. 1800 N               | ISO - 10545-4  |
| Impact resistance                           | As per mfg.                                    | Min. 0.55                 | ISO - 10545-5  |
| <b>SURFACE MECHANICAL PROPERTIES</b>        |  |                           |                |
| Resistance to surface abrasion (PEI Rating) | As per mfg.                                    | Class 4                   | ISO - 10545-7  |
| MOH's harfness                              | As per mfg.                                    | Min 5                     | EN 101         |
| <b>THERMO HYGROMRTRIC PROPERTIES</b>        |  |                           |                |
| Frost resistance                            | No damage                                      | No damage                 | ISO - 10545-12 |
| Thermal shock resistance                    | No damage                                      | No damage                 | ISO - 10545-9  |
| Moisture expansion                          | Nil  | Nil                       | ISO - 10545-10 |
| Thermal expansion (COE)                     | Max. 9.0x10 <sup>0</sup>                       | Max. 6.5x10 <sup>0</sup>  | ISO - 10545-8  |
| Crazing resistance                          | As per mfg.                                    | Min 10 Cycle              | ISO - 10545-11 |
| <b>CHEMICAL PROPERTIES</b>                  |  |                           |                |
| Chemical resistance                         | No damage                                      | No damage                 | ISO - 10545-13 |
| Stain resistance                            | Min. Class 3                                   | Class 5                   | ISO - 10545-14 |
| <b>SEFETY PROPERTIES</b>                    |  |                           |                |
| Slip resistance                             | As per mfg.                                    | > 0.40                    | ISO - 10545-17 |
| Fire resistance                             | As per mfg.                                    | Fireproof                 | N.A.           |
| Lead & Cafmium given off by glazes tiles    | As per mfg.                                    | Does not yield Pb & Cd    | ISO - 10545-15 |